


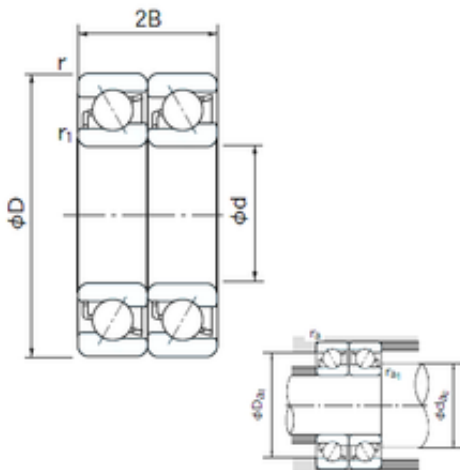

Bearing No. 7314CDT

C	35 mm
d	70 mm
B	35 mm
D	150 mm
r1	1.1 mm
2B	70 mm
a -	4.8 mm
Width	35 mm
r min.	2.1 mm
Weight	2.70 Kg
ra max.	1 mm
r1 min.	1.1 mm
da min.	82 mm
Da max.	143 mm
ra (max)	2 mm
da1 (min)	82 mm
Bore Size	70 mm
Enclosure	Open
Bore Type	Cylindrical Bore
ra1 (max)	1 mm
Size (mm)	70x150x35
da2 (min)	82 mm
Da2 (max)	143 mm
Da1 (max)	138 mm
Width (mm)	35
Configuration	Duplex
Bearing number	7314CDT
Angle (?)	15 °
Outside Diameter	150 mm
Static Load Rating	185,000 N

Bore Diameter (mm)	70
Dynamic Load Rating	206,000 N
Outer Diameter (mm)	150
Limiting Speed - Oil	8,000 rpm
Fillet Radius/Chamfer	2.1 mm
Limiting Speed - Grease	5,800 rpm
(Grease) Lubrication Speed	5800 r/min
Basic dynamic load rating (C)	206 kN
Basic static load rating (C0)	185 kN