


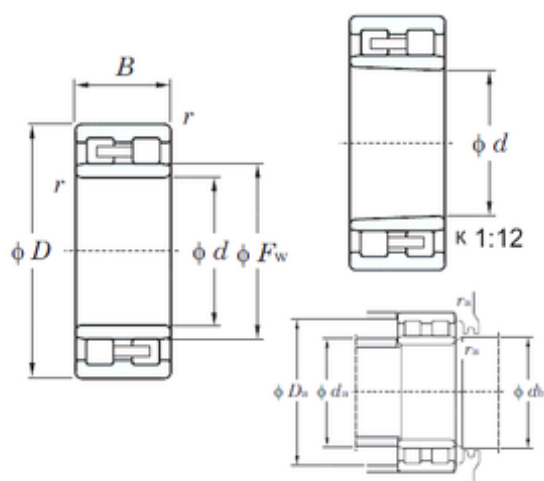

Bearing No. NNU4936K

|                  |            |
|------------------|------------|
| d                | 180 mm     |
| D                | 250 mm     |
| B                | 69 mm      |
| C                | 69 mm      |
| Ew               | -          |
| Cu               | 117        |
| Fw               | 202 mm     |
| Cr               | 572        |
| C0r              | 964        |
| db min           | 205 mm     |
| Weight           | 10,1 Kg    |
| r min.           | 2 mm       |
| da max           | 199,5 mm   |
| r(min)           | 2          |
| db(min)          | 205        |
| Da(max)          | 241        |
| da(min)          | 189        |
| ra max.          | 2 mm       |
| da(max)          | 199.5      |
| Da max.          | 241 mm     |
| da min.          | 189 mm     |
| Da(min)          | -          |
| ra(max)          | 2          |
| Oil lub.         | 2600       |
| Size (mm)        | 180x250x69 |
| Width (mm)       | 69         |
| Bearing No.      | NNU4936K   |
| Grease lub.      | 2100       |
| Bearing number   | NNU4936K   |
| (Refer.)Mass(kg) | 10.1       |
|                  |            |

|                               |            |
|-------------------------------|------------|
| Bore Diameter (mm)            | 180        |
| Outer Diameter (mm)           | 250        |
| (Grease) Lubrication Speed    | 2100 r/min |
| Basic static load rating (C0) | 964 kN     |
| Basic dynamic load rating (C) | 458 kN     |