


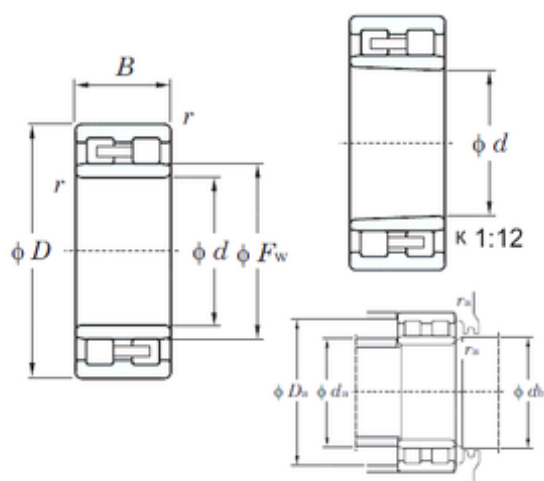

Bearing No. NNU4930K

|                  |            |
|------------------|------------|
| d                | 150 mm     |
| D                | 210 mm     |
| B                | 60 mm      |
| C                | 60 mm      |
| Ew               | -          |
| Cu               | 80.7       |
| Fw               | 168,5 mm   |
| Cr               | 430        |
| C0r              | 692        |
| db min           | 171 mm     |
| Weight           | 6,22 Kg    |
| r min.           | 2 mm       |
| da max           | 166 mm     |
| r(min)           | 2          |
| db(min)          | 171        |
| Da(max)          | 201        |
| da(min)          | 159        |
| ra max.          | 2 mm       |
| da(max)          | 166        |
| Da max.          | 201 mm     |
| da min.          | 159 mm     |
| Da(min)          | -          |
| ra(max)          | 2          |
| Oil lub.         | 3100       |
| Size (mm)        | 150x210x60 |
| Width (mm)       | 60         |
| Bearing No.      | NNU4930K   |
| Grease lub.      | 2600       |
| Bearing number   | NNU4930K   |
| (Refer.)Mass(kg) | 6.22       |
|                  |            |

|                               |            |
|-------------------------------|------------|
| Bore Diameter (mm)            | 150        |
| Outer Diameter (mm)           | 210        |
| (Grease) Lubrication Speed    | 2600 r/min |
| Basic static load rating (C0) | 692 kN     |
| Basic dynamic load rating (C) | 343 kN     |