


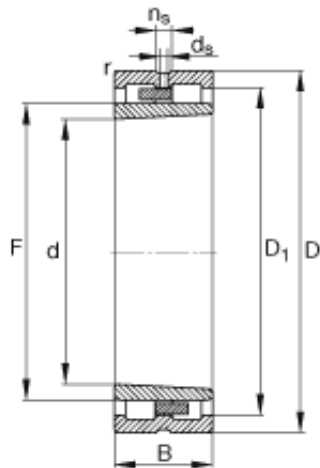

Bearing No. NNU4932-S-K-M-SP

|                     |                                                                  |
|---------------------|------------------------------------------------------------------|
| F                   | 178,5 mm                                                         |
| d                   | 160 mm                                                           |
| D                   | 220 mm                                                           |
| B                   | 60 mm                                                            |
| m                   | 8 kg / Weight                                                    |
| s                   | 2,3 mm / Axial displacement facility from central position       |
| Size (mm)           | 160x220x60                                                       |
| Width (mm)          | 60                                                               |
| $C_r$               | 335000 N / Dynamic load rating (radial)                          |
| $D_1$               | 200,9 mm                                                         |
| Bearing number      | NNU4932-S-K-M-SP                                                 |
| $C_{0r}$            | 680000 N / Static load rating (radial)                           |
| $C_{ur}$            | 98000 N / Fatigue limit load, radial                             |
| $r_{min}$           | 2 mm                                                             |
| $n_{G\ OI}$         | 4000 1/min / Limiting speed for minimal quantity oil lubrication |
| $r_{a\ max}$        | 2 mm                                                             |
| $D_{b\ min}$        | mm                                                               |
| $D_{a\ max}$        | 211 mm                                                           |
| $d_{a\ min}$        | 169 mm                                                           |
| Bore Diameter (mm)  | 160                                                              |
| $n_{G\ Fett}$       | 3400 1/min / Limiting speed for grease lubrication               |
| Outer Diameter (mm) | 220                                                              |