


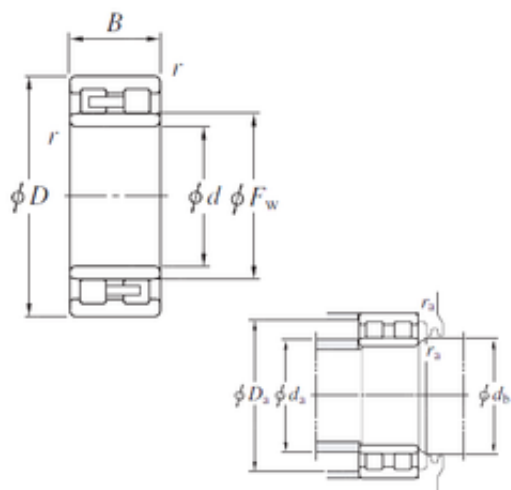

Bearing No. NNU4928

|                  |            |
|------------------|------------|
| d                | 140 mm     |
| D                | 190 mm     |
| B                | 50 mm      |
| C                | 50 mm      |
| Ew               | -          |
| Cu               | 52.5       |
| Fw               | 156 mm     |
| Cr               | 277        |
| C0r              | 456        |
| db min           | 158 mm     |
| Weight           | 4,15 Kg    |
| r min.           | 1,5 mm     |
| da max           | 153,5 mm   |
| r(min)           | 1.5        |
| db(min)          | 158        |
| Da(max)          | 182        |
| da(min)          | 148        |
| ra max.          | 1,5 mm     |
| da(max)          | 153.5      |
| Da max.          | 182 mm     |
| da min.          | 148 mm     |
| Da(min)          | -          |
| ra(max)          | 1.5        |
| Oil lub.         | 3500       |
| Size (mm)        | 140x190x50 |
| Width (mm)       | 50         |
| Bearing No.      | NNU4928    |
| Grease lub.      | 2900       |
| Bearing number   | NNU4928    |
| (Refer.)Mass(kg) | 4.15       |
|                  |            |

|                               |            |
|-------------------------------|------------|
| Bore Diameter (mm)            | 140        |
| Outer Diameter (mm)           | 190        |
| (Grease) Lubrication Speed    | 2900 r/min |
| Basic static load rating (C0) | 456 kN     |
| Basic dynamic load rating (C) | 222 kN     |