


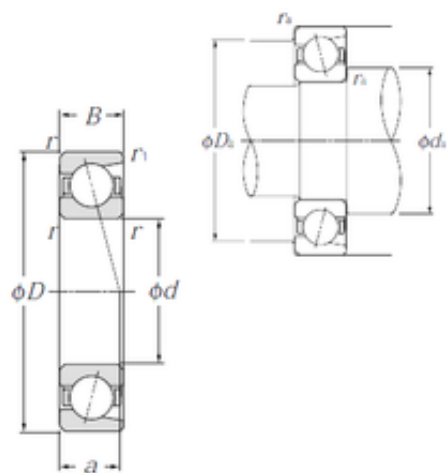

Bearing No. 7215

D	130 mm
d	75 mm
B	25 mm
C	25 mm
a	42,5 mm
Bore	2.953 Inch 75 Millimeter
Noun	Bearing
Mass	1.17 kg
Width	0.984 Inch 25 Millimeter
Weight	1,17 Kg
UNSPSC	31171531
ra max	1 mm
Db max	124.5 mm
da min	83.5 mm
rs min	1.5 mm
Da max	121.5 mm
r min.	1,5 mm
db min	80,5 mm
ra max.	1,5 mm
da min.	83,5 mm
r1a max	1 mm
r1 min.	1 mm
r1s min	1 mm
Category	Angular Contact Ball Bearing
Enclosure	Open
Inventory	0.0
Size (mm)	75x130x25
Snap Ring	No

Nlim (oil)	7,100 rpm
Width (mm)	25
Flush Ground	No
Contact Angle	30 Degree
Cage Material	Steel
Nlim (grease)	5,300 rpm
Inch - Metric	Metric
Product Group	B00308
Keyword String	Angular Contact
Bearing number	7215
Static load, C0	68.5 kN
Angle (?)	25 °
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Dynamic load, C	79 kN
Outside Diameter	5.118 Inch 130 Millimeter
Manufacturer URL	http://www.ntnamerica.com
Long Description	75MM Bore; 130MM Outside Diameter; 25MM Width; Open; No Flush Ground; Ball Bearing; Single Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; C0-Medium; Steel Cage; 30 Degree; 1 (Single)
Contact angle ?	30 °
Manufacturer Name	NTN
Weight / Kilogram	1.18
Bore Diameter (mm)	75
Number of Bearings	1 (Single)
Internal Clearance	C0-Medium
Outer Diameter (mm)	130

Minimum Buy Quantity	N/A
Fatigue limit load, Cu	3.1 kN
Harmonized Tariff Code	8482.10.50.28
Number of Rows of Balls	Single Row
Manufacturer Item Number	7215
(Grease) Lubrication Speed	5 300 r/min
Basic static load rating (C0)	68,5 kN
Basic dynamic load rating (C)	79 kN
Maximum Capacity / Filling Slot	No
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C