


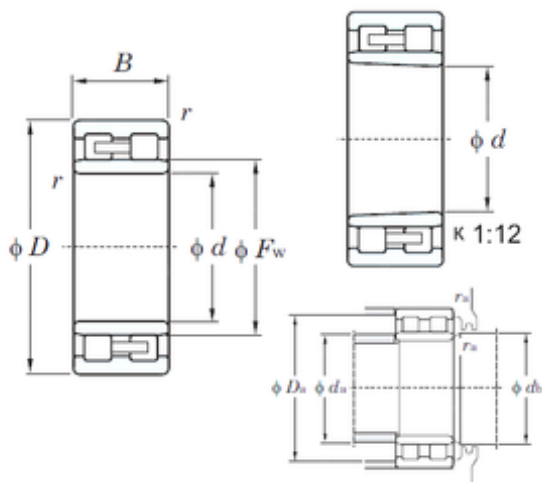

Bearing No. NNU4921K

|                  |            |
|------------------|------------|
| d                | 105 mm     |
| D                | 145 mm     |
| B                | 40 mm      |
| C                | 40 mm      |
| Ew               | -          |
| Cu               | 40.2       |
| Fw               | 118 mm     |
| Cr               | 196        |
| C0r              | 306        |
| db min           | 120 mm     |
| Weight           | 1,91 Kg    |
| r min.           | 1,1 mm     |
| da max           | 116 mm     |
| r(min)           | 1.1        |
| db(min)          | 120        |
| Da(max)          | 138.5      |
| da(min)          | 111.5      |
| ra max.          | 1 mm       |
| da(max)          | 116        |
| Da max.          | 138,5 mm   |
| da min.          | 111,5 mm   |
| Da(min)          | -          |
| ra(max)          | 1          |
| Oil lub.         | 4600       |
| Size (mm)        | 105x145x40 |
| Width (mm)       | 40         |
| Bearing No.      | NNU4921K   |
| Grease lub.      | 3900       |
| Bearing number   | NNU4921K   |
| (Refer.)Mass(kg) | 1.91       |
|                  |            |

|                               |            |
|-------------------------------|------------|
| Bore Diameter (mm)            | 105        |
| Outer Diameter (mm)           | 145        |
| (Grease) Lubrication Speed    | 3900 r/min |
| Basic static load rating (C0) | 306 kN     |
| Basic dynamic load rating (C) | 157 kN     |