


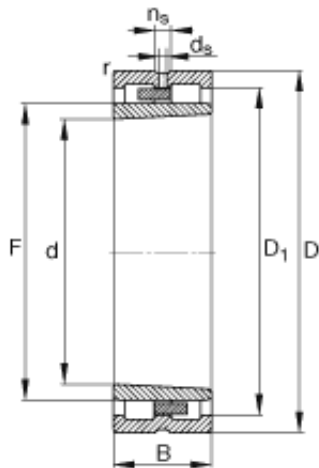

Bearing No. NNU4920-S-K-M-SP

F	113 mm
d	100 mm
D	140 mm
B	40 mm
m	1,88 kg / Weight
s	2 mm / Axial displacement facility from central position
Size (mm)	100x140x40
Width (mm)	40
C_r	129000 N / Dynamic load rating (radial)
D_1	125,8 mm
Bearing number	NNU4920-S-K-M-SP
C_{0r}	255000 N / Static load rating (radial)
C_{ur}	40500 N / Fatigue limit load, radial
r_{min}	1,1 mm
$n_{G\ OI}$	6300 1/min / Limiting speed for minimal quantity oil lubrication
$r_{a\ max}$	1 mm
$D_{b\ min}$	mm
$D_{a\ max}$	134 mm
$d_{a\ min}$	106 mm
Bore Diameter (mm)	100
$n_{G\ Fett}$	5300 1/min / Limiting speed for grease lubrication
Outer Diameter (mm)	140