


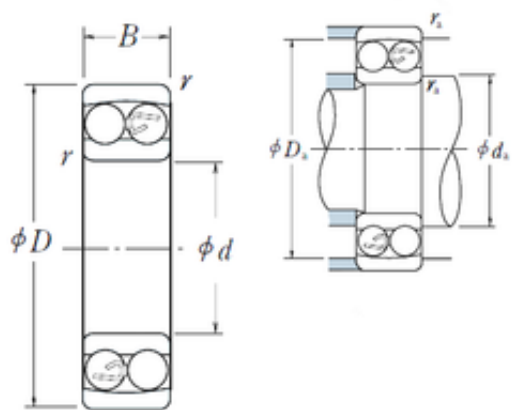

Bearing No. 1218

r	2
d	90 mm
D	160 mm
B	30 mm
C	30 mm
e	0.17
Y0	3.9
X1	1
B_	30
ra	2
Y2	5.8
D_	160
Y3	3.8
C0	23.5
X0	1
da	99
X2	0.65
PCD	124.5
D_a	151
SRI	8.33
SRE	0
mass	2.5
CAng	6.37
KBRG	1352
yobi	1218
SREX	0
SRIX	0.065
SRIN	0
SREN	0
r min.	2 mm

Weight	2,55 Kg
LangID	1
GRS rpm	3600
cyl dia	15.875
Oil rpm	4300
hidYobi	1218
da min.	99 mm
Da max.	151 mm
ra max.	2 mm
hidTable	ecat_NSSAB
cyl count	19
Size (mm)	90x160x30
Prod_Type3	SABB_SA_CB
Width (mm)	30
groove inner	108.62
groove outer	141.149
Bearing number	1218
Bore Diameter (mm)	90
Outer Diameter (mm)	160
Calculation factor (e)	0,17
(Oil) Lubrication Speed	4 300 r/min
Calculation factor (Y0)	3,9
Calculation factor (Y2)	5,8
(Grease) Lubrication Speed	3 600 r/min
Basic static load rating (C0)	23,5 kN
Basic dynamic load rating (C)	57,5 kN