


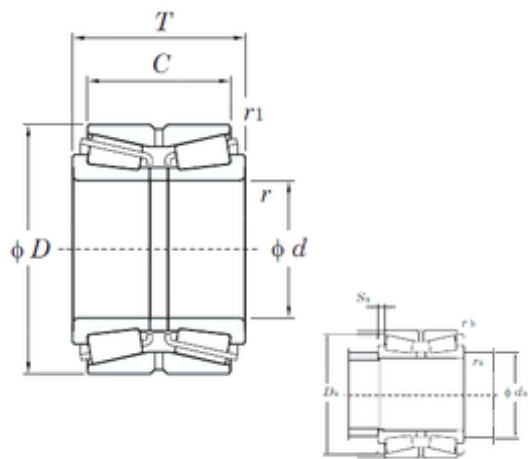

Bearing No. 46384

|             |             |
|-------------|-------------|
| e           | 0.39        |
| d           | 420 mm      |
| D           | 700 mm      |
| T           | 224 mm      |
| C           | 200 mm      |
| Y0          | 1.70        |
| Y3          | 2.59        |
| Cu          | 324         |
| Y2          | 1.74        |
| Cr          | 4650        |
| C0r         | 6880        |
| r(min)      | 6           |
| Weight      | 325 Kg      |
| Da min      | 656 mm      |
| r min.      | 6 mm        |
| r1(min)     | 3           |
| Sa(min)     | 12          |
| ra(max)     | 5           |
| da(min)     | 448         |
| rb(max)     | 2.5         |
| Da(min)     | 686         |
| rb max.     | 2,5 mm      |
| ra max.     | 5 mm        |
| da min.     | 448 mm      |
| r1 min.     | 3 mm        |
| Oil lub.    | 380         |
| Size (mm)   | 420x700x224 |
| Width (mm)  | 224         |
| Bearing No. | 46384       |
| Grease lub. | 290         |
|             |             |

|                               |           |
|-------------------------------|-----------|
| Bearing number                | 46384     |
| (Refer.)Mass(kg)              | 325       |
| Bore Diameter (mm)            | 420       |
| Outer Diameter (mm)           | 700       |
| Calculation factor (e)        | 0,39      |
| Calculation factor (Y0)       | 1,7       |
| (Oil) Lubrication Speed       | 380 r/min |
| (Grease) Lubrication Speed    | 290 r/min |
| Basic static load rating (C0) | 6880 kN   |
| Basic dynamic load rating (C) | 3700 kN   |