


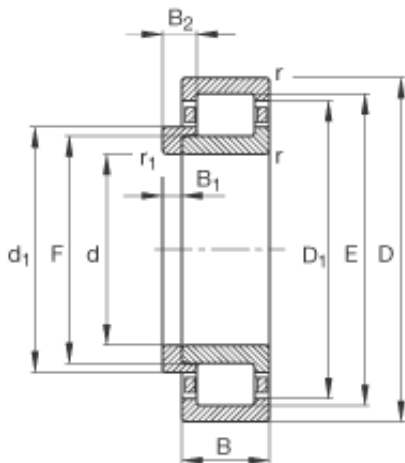

Bearing No. NJ2203-E-TVP2 + HJ2203-E

m	0,053 kg / Weight
F	22,1 mm
E	35,1 mm
d	17 mm
D	40 mm
B	16 mm
s	1,7 mm / Axial displacement facility from central position
Size (mm)	17x40x16
Width (mm)	16
C _r	28500 N / Dynamic load rating (radial)
m ₁	0,0080 kg
B ₂	6 mm
d ₁	24,7 mm
D ₁	32,5 mm
B ₁	3 mm
n _G	22900 1/min / Limiting speed
n _B	13300 1/min / Reference speed
C _{0r}	21900 N / Static load rating (radial)
Bearing number	NJ2203-E-TVP2 + HJ2203-E
C _{ur}	3450 N / Fatigue limit load, radial
r _{min}	0,6 mm
r _{a max}	0,6 mm
r _{1 min}	0,3 mm

$d_{a\ min}$	21 mm
$d_{a\ max}$	21,5 mm
$D_{a\ max}$	36 mm
$d_{c\ min}$	26 mm
Bore Diameter (mm)	17
Outer Diameter (mm)	40
- HJ2203-E / Designation, L-section ring	HJ2203E / Designation, Lsection ring