


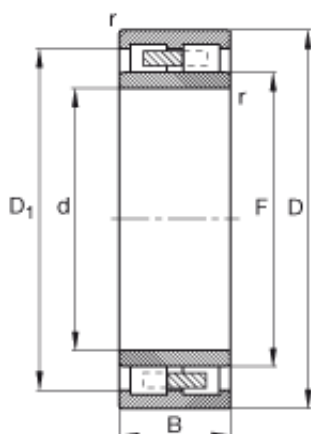

**Bearing No. NNU4126-M**

|                     |                                                            |
|---------------------|------------------------------------------------------------|
| S                   | 2,9 mm / Axial displacement facility from central position |
| d                   | 130 mm                                                     |
| D                   | 210 mm                                                     |
| B                   | 80 mm                                                      |
| m                   | 10,8 kg / Weight                                           |
| F                   | 151 mm                                                     |
| Size (mm)           | 130x210x80                                                 |
| Width (mm)          | 80                                                         |
| $n_G$               | 3600 1/min / Limiting speed                                |
| $C_r$               | 490000 N / Dynamic load rating (radial)                    |
| $D_1$               | 182,5 mm                                                   |
| $C_{Or}$            | 850000 N / Static load rating (radial)                     |
| Bearing number      | NNU4126-M                                                  |
| $r_{min}$           | 2 mm                                                       |
| $r_{a \max}$        | 2 mm                                                       |
| $d_{a \min}$        | 141 mm                                                     |
| $D_{a \max}$        | 199 mm                                                     |
| Bore Diameter (mm)  | 130                                                        |
| Outer Diameter (mm) | 210                                                        |