


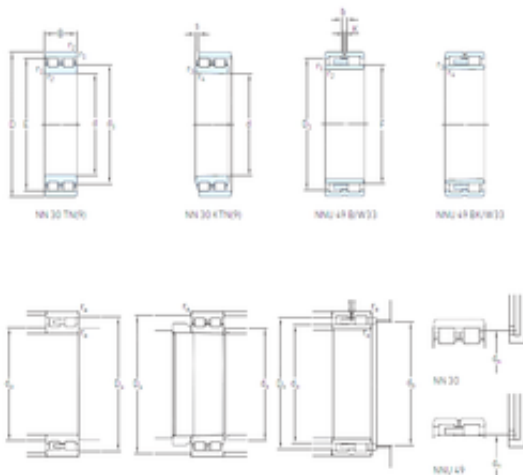

Bearing No. NNU 4976 B/SPW33

S	5,5 mm
K	9 mm
d	380 mm
D	520 mm
B	140 mm
C	140 mm
b	16,7 mm
F	426 mm
dh	– mm
D1	470,8 mm
s max.	5.5 mm
Weight	83,5 Kg
db min	431 mm
da max	421 mm
Da max.	505 mm
da min.	395 mm
ra max.	3 mm
r4 min.	2,5 mm
r3 min.	2,5 mm
r1 min.	4 mm
r2 min.	4 mm
Size (mm)	380x520x140
Width (mm)	140
Mass bearing	83.5 kg
D ₁	470.8 mm
Bearing number	NNU 4976 B/SPW33
d _a min.	395 mm
r _a max.	3 mm
D _a max.	505 mm
d _b min.	431 mm

d _a max.	421 mm
Bore Diameter (mm)	380
Outer Diameter (mm)	520
r _{1,2} min.	4 mm
(Oil) Lubrication Speed	1 500 r/min
(Grease) Lubrication Speed	1 300 r/min
Basic dynamic load rating C	1450 kN
Basic dynamic load rating (C)	1 450 kN
Basic static load rating (C ₀)	3 600 kN
Fatigue load limit P _u	320 kN
Basic static load rating C ₀	3600 kN
Attainable speed for grease lubrication	1300 r/min
Attainable speed for oil-air lubrication	1500 r/min