


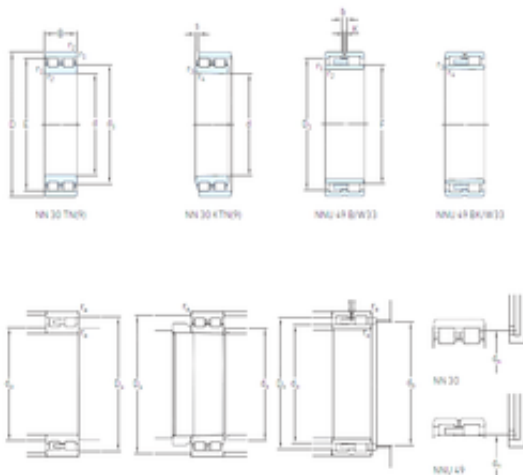

Bearing No. NNU 4980 B/SPW33

S	5,5 mm
K	9 mm
d	400 mm
D	540 mm
B	140 mm
C	140 mm
b	16,7 mm
F	446 mm
dh	– mm
D1	490,8 mm
s max.	5.5 mm
Weight	87,5 Kg
db min	451 mm
da max	441 mm
Da max.	524 mm
da min.	415 mm
ra max.	3 mm
r4 min.	2,5 mm
r3 min.	2,5 mm
r1 min.	4 mm
r2 min.	4 mm
Size (mm)	400x540x140
Width (mm)	140
Mass bearing	88 kg
D ₁	490.8 mm
Bearing number	NNU 4980 B/SPW33
d _a min.	415 mm
r _a max.	3 mm
D _a max.	524 mm
d _b min.	451 mm

d _a max.	441 mm
Bore Diameter (mm)	400
Outer Diameter (mm)	540
r _{1,2} min.	4 mm
(Oil) Lubrication Speed	1 500 r/min
(Grease) Lubrication Speed	1 300 r/min
Basic dynamic load rating C	1470 kN
Basic dynamic load rating (C)	1 470 kN
Basic static load rating (C ₀)	3 800 kN
Fatigue load limit P _u	335 kN
Basic static load rating C ₀	3800 kN
Attainable speed for grease lubrication	1300 r/min
Attainable speed for oil-air lubrication	1500 r/min