


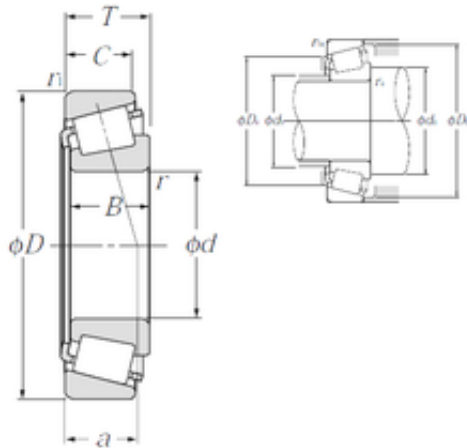

Bearing No. 4T-L327249/L327210

a	29.1 mm
D	177,008 mm
C	20,638 mm
B	26,195 mm
T	25,4 mm
e	0.35
d	133,35 mm
Y2	1.72
d1	156 mm
Y0	0.95
da	142 mm
Db	171 mm
db	140 mm
Da	167 mm
a -	3,7 mm
Mass	1.7 kg
Weight	1,7 Kg
ra max	1.5 mm
ra max.	1,5 mm
r1a max	1.5 mm
ra1 max.	1,5 mm
Category	Bearings
Inventory	0.0
Size (mm)	133.35x177.008x25.4
Width (mm)	25,4
Nlim (oil)	2,400 rpm
Nlim (grease)	1,800 rpm
Product Group	B04334
Bearing number	4T-L327249/L327210
Dynamic load, C	126 kN

Static load, C0	259 kN
Weight / Kilogram	1.76
Manufacturer Name	NTN
Bore Diameter (mm)	133,35
Outer Diameter (mm)	177,008
Minimum Buy Quantity	N/A
Calculation factor (e)	0,35
Fatigue limit load, Cu	27.7 kN
Calculation factor (Y0)	0,95
(Oil) Lubrication Speed	2 400 r/min
(Grease) Lubrication Speed	1 800 r/min
Rating life coefficient, A2	1.4
Basic static load rating (C0)	259 kN
Basic dynamic load rating (C)	126 kN
Max operating temperature, Tmax	120 °C
Min operating temperature, Tmin	-40 °C
Characteristic cage frequency, FTF	0.47 Hz
Characteristic outer ring frequency, BPF0	19.86 Hz
Characteristic inner ring frequency, BPFI	22.14 Hz
Characteristic rolling element frequency, BSF	17.94 Hz