


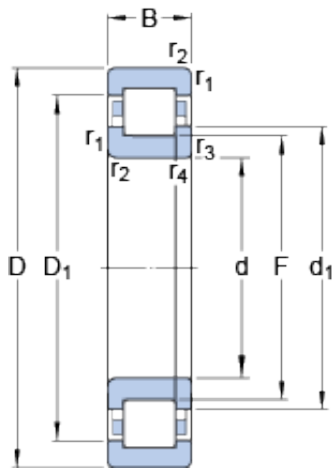

Bearing No. NUP 2308 ECML

F	52 mm
d	40 mm
D	90 mm
B	33 mm
Size (mm)	90x40x33
Width (mm)	33
Mass bearing	1.1 kg
d ₁	57.5 mm
D ₁	75.55 mm
Limiting speed	9500 r/min
Bearing number	NUP 2308 ECML
Reference speed	8000 r/min
Limiting value e	0.3
d _a min.	48 mm
D _a max.	81.8 mm
r _a max.	1.5 mm
Bore Diameter (mm)	90
d _b min.	60 mm
Outer Diameter (mm)	40
Axial load factor Y	0.4
r _a - max.	1.5 mm
D _a - max.	81.8 mm
d _b - min.	60 mm
d _a - min.	48 mm
r _{1,2} min.	1.5 mm
r _{3,4} min.	1.5 mm
d ₁ ?	57.5 mm
D ₁ ?	75.55 mm
r _{1,2} - min.	1.5 mm
r _{3,4} - min.	1.5 mm

Basic dynamic load rating C	129 kN
Basic dynamic load rating - C	129 kN
Fatigue load limit P_u	15.3 kN
Calculation factor k_r	0.38
Calculation factor - k_r	0.38
Fatigue load limit - P_u	15.3 kN
Basic static load rating C_0	120 kN
Basic static load rating - C_0	120 kN