


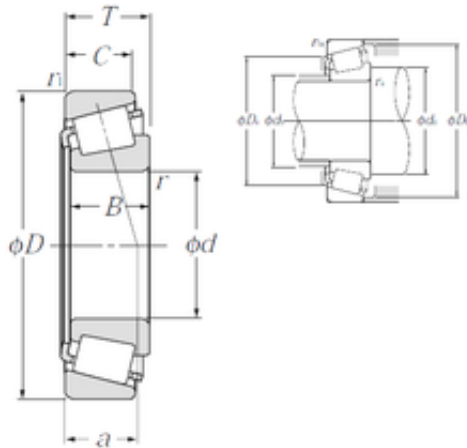

Bearing No. 4T-67388/67322

e	0.34
a	6,3 mm
d	127 mm
D	196,85 mm
T	46,038 mm
B	46,038 mm
C	38,1 mm
Y0	0.96
Db	189 mm
da	144 mm
Y2	1.74
d1	165.5 mm
Da	180 mm
db	138 mm
Mass	5.1 kg
Weight	5,1 Kg
ra max	3.5 mm
ra max.	3,5 mm
r1a max	3.3 mm
ra1 max.	3,3 mm
Category	Bearings
Inventory	0.0
Size (mm)	127x196.85x46.038
Width (mm)	46,038
Nlim (oil)	2,200 rpm
Nlim (grease)	1,700 rpm
Product Group	B04334
Bearing number	4T-67388/67322
Dynamic load, C	310 kN
Static load, C0	550 kN

Weight / Kilogram	5.101
Manufacturer Name	NTN
Bore Diameter (mm)	127
Outer Diameter (mm)	196,85
Minimum Buy Quantity	N/A
Calculation factor (e)	0,34
Fatigue limit load, Cu	57.7 kN
Calculation factor (Y0)	0,96
(Oil) Lubrication Speed	2 200 r/min
(Grease) Lubrication Speed	1 700 r/min
Rating life coefficient, A2	1.4
Basic static load rating (C0)	550 kN
Basic dynamic load rating (C)	310 kN
Max operating temperature, Tmax	120 °C
Min operating temperature, Tmin	-40 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic outer ring frequency, BPF0	13.2 Hz
Characteristic inner ring frequency, BPFI	15.8 Hz
Characteristic rolling element frequency, BSF	10.77 Hz