


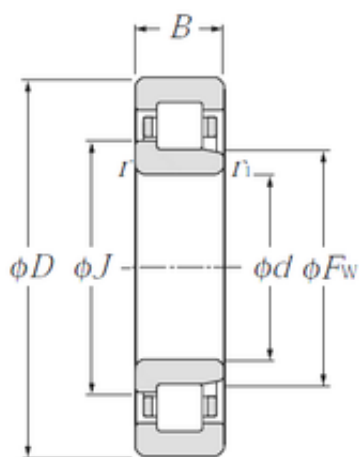

Bearing No. NJ2313

E	121.5 mm
D	140 mm
J	91 mm
F	83.5 mm
B	48 mm
C	48 mm
d	65 mm
Fw	83,5 mm
d1	91 mm
Noun	Bearing
Bore	2.559 Inch 65 Millimeter
Width	1.89 Inch 48 Millimeter
dc min	93 mm
Da max	129 mm
da max	81 mm
da min	76 mm
ra max	2 mm
rs min	2.1 mm
UNSPSC	31171547
Weight	3,27 Kg
r min.	2,1 mm
r1s min	2.1 mm
Profile	Complete with Outer and Inner Ring
r1 min.	2,1 mm
Retainer	Yes
Category	Cylindrical Roller Bearing
flanges:	(2) Outer Ring, (1) Inner Ring

Snap Ring	No
Inventory	0.0
Separable	Inner Ring - One Side
Size (mm)	65x140x48
bore type:	Straight
Nlim (oil)	5,200 rpm
Width (mm)	48
Weight / LBS	7.28
maximum rpm:	5200 rpm
Bore Profile	Straight
Cage Material	Steel
Inch - Metric	Metric
Product Group	B04144
Nlim (grease)	4,400 rpm
closure type:	Open
Other Features	1 Rib Inner Ring 2 Rib Outer Ring Cage On Outer Ring ID
overall width:	48 mm
cage material:	Pressed Steel
Relubricatable	Yes
fillet radius:	2 mm
bore diameter:	65 mm
Bearing number	NJ2313
Rolling Element	Cylindrical Roller Bearing
Dynamic load, C	188 kN
Precision Class	RBEC 1 ISO P0
Static load, C0	212 kN
number of rows:	1
finish/coating:	Uncoated
Manufacturer URL	http://www.ntnamerica.com

Outside Diameter	5.512 Inch 140 Millimeter
Long Description	65MM Bore; Straight Bore Profile; 140MM Outside Diameter; 48MM Width; Steel Cage Matetrial; RBEC 1 ISO P0; Single Row; Inner Ring - One Side Separable; No Snap Ring; Relubricatable; C0-Medium Intern
bearing material:	Hardened Alloy Steel
outside diameter:	140 mm
precision rating:	ISO Class 0
Manufacturer Name	NTN
Weight / Kilogram	3.31
Bore Diameter (mm)	65
Internal Clearance	C0-Medium
Outer Diameter (mm)	140
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	188000 N
Mass (without HJ ring)	3.29 kg
Radial clearance class	CN
Fatigue limit load, Cu	25.7 kN
Harmonized Tariff Code	8482.50.00.00
dynamic load capacity:	212000 N
Manufacturer Item Number	NJ2313
Number of Rows of Rollers	Single Row
(Grease) Lubrication Speed	4 400 r/min
manufacturer product page:	Click here

operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	212 kN
Basic dynamic load rating (C)	188 kN
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C