


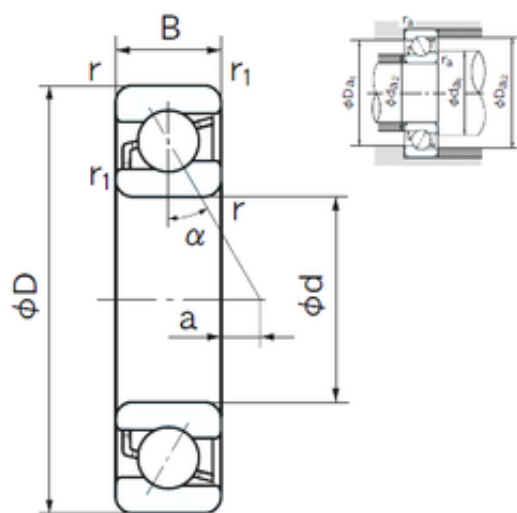

Bearing No. 7238B

D	340 mm
d	190 mm
B	55 mm
C	55 mm
a	83.7 mm
r1	1.5 mm
Width	55 mm
Weight	21.5 Kg
r min.	4 mm
ra max.	3 mm
Da max.	322 mm
da min.	208 mm
r1 min.	1.5 mm
ra (max)	3 mm
Da1 (max)	322 mm
Da2 (max)	331 mm
da2 (min)	199 mm
da1 (min)	208 mm
Size (mm)	190x340x55
Enclosure	Open
Bore Type	Cylindrical Bore
Bore Size	190 mm
ra1 (max)	1.5 mm
Width (mm)	55
Configuration	Single Row
Bearing number	7238B
Angle (?)	40 °
Outside Diameter	340 mm
Static Load Rating	385,000 N
Bore Diameter (mm)	190

Dynamic Load Rating	294,000 N
Outer Diameter (mm)	340
Limiting Speed - Oil	2,000 rpm
Fillet Radius/Chamfer	4 mm
Limiting Speed - Grease	1,400 rpm
(Grease) Lubrication Speed	1400 r/min
Basic static load rating (C0)	385 kN
Basic dynamic load rating (C)	294 kN