


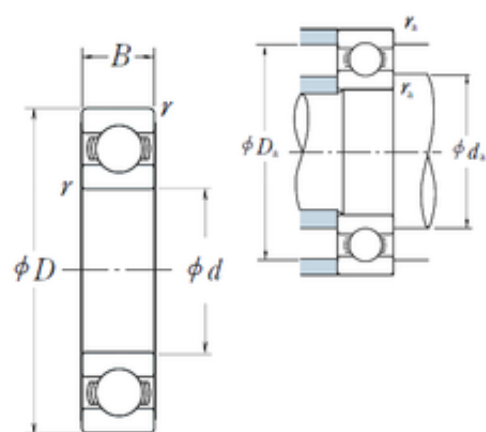

Bearing No. 16022

D	170 mm
d	110 mm
B	19 mm
C	19 mm
r	1
Z_	17
B_	19
D_	170
ra	1
C0	56.5
fo	16.3
DI_	125.712
SRE	7.39
SRI	7.39
D_a	165
DA_	14.288
DE_	154.288
mass	1.51
SREN	-0.03
SBRG	0
KBRG	6101
SREX	0.03
Bore	4.331 Inch 110 Millimeter
SRIX	0.03
Noun	Bearing
SRIN	-0.03
yobi	16022
SDM_	140
bomp	0

C_conv	57500
da min	115
LangID	1
r min.	1 mm
ALPHA_	0
UNSPSC	31171504
Weight	1,51 Kg
ra max.	1 mm
Da max.	165 mm
GRS rpm	3800
Oil rpm	4500
da min.	115 mm
hidYobi	16022
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Enclosure	Open
Inventory	0.0
Snap Ring	No
Size (mm)	110x170x19
Prod_Type3	DGBB_SR_OT
Width (mm)	19
Weight / LBS	2.866
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Bearing number	16022
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outside Diameter	6.693 Inch 170 Millimeter
Outer Race Width	0.748 Inch 19 Millimeter

Long Description	110MM Bore; 170MM Outside Diameter; 19MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Manufacturer Name	NSK
Weight / Kilogram	1.3
Internal Clearance	C0-Medium
Bore Diameter (mm)	110
Outer Diameter (mm)	170
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	4 500 r/min
Internal Special Features	No
(Grease) Lubrication Speed	3 800 r/min
Basic static load rating (C0)	56,5 kN
Basic dynamic load rating (C)	57,5 kN
Maximum Capacity / Filling Slot	No