


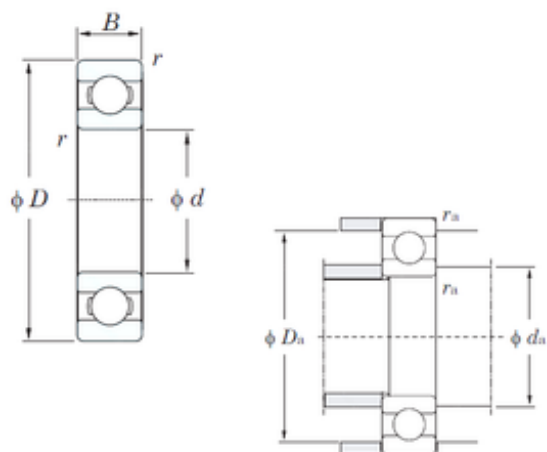

Bearing No. 6304

D	52 mm
d	20 mm
B	15 mm
C	15 mm
f0	12.3
Cu	0.660
Cr	19.9
C0r	7.85
Bore	0.787 Inch 20 Millimeter
Noun	Bearing
UNSPSC	31171504
Weight	0,144 Kg
r(min)	1.1
r min.	1,1 mm
da min.	26,5 mm
ra(max)	1
Da max.	45,5 mm
Da(max)	45.5
da(min)	26.5
ra max.	1 mm
Category	Single Row Ball Bearing
Oil lub.	17000
Inventory	0.0
Enclosure	Open
Size (mm)	20x52x15
Snap Ring	No
Width (mm)	15
Grease lub.	14000
Bearing No.	6304

Weight / LBS	0.355
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Keyword String	Ball
Bearing number	6304
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.591 Inch 15 Millimeter
Long Description	20MM Bore; 52MM Outside Diameter; 15MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	2.047 Inch 52 Millimeter
(Refer.)Mass(kg)	0.144
Manufacturer URL	http://www.koyousa.com
Weight / Kilogram	0.161
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	20
Outer Diameter (mm)	52
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	17000 r/min
Manufacturer Item Number	6304
Internal Special Features	No
(Grease) Lubrication Speed	14000 r/min

Basic static load rating (C0)	7,85 kN
Basic dynamic load rating (C)	15,9 kN
Maximum Capacity / Filling Slot	No