


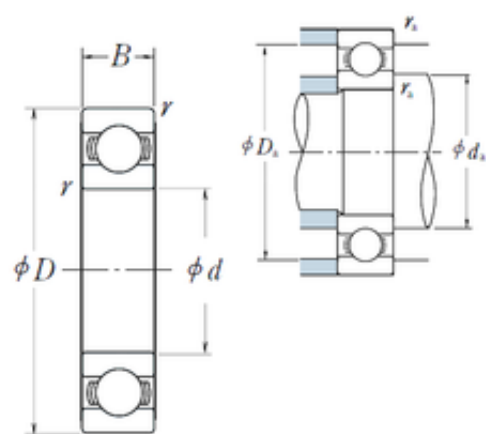

Bearing No. 6304

D	52 mm
d	20 mm
B	15 mm
C	15 mm
r	1.1
Z_	7
C0	7.9
ra	1
fo	12.4
D_	52
B_	15
DI_	26.475
SRI	4.81
DE_	45.525
DA_	9.525
SRE	5
D_a	45.5
KBRG	6101
SRIX	0.02
Noun	Bearing
yobi	6304
SDM_	36
bomp	0
SRIN	0
Bore	0.787 Inch 20 Millimeter
SREX	0.04
mass	0.145
SBRG	3
SREN	0

ALPHA_	0
UNSPSC	31171504
da max	28 mm
LangID	1
r min.	1,1 mm
C_conv	15900
Weight	0,145 Kg
da min	26.5
GRS rpm	14000
Oil rpm	17000
hidYobi	6304
da min.	26,5 mm
Da max.	45,5 mm
ra max.	1 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Inventory	0.0
Snap Ring	No
Size (mm)	20x52x15
Enclosure	Open
bore type:	Round
Prod_Type3	DGBB_SR_OT
Width (mm)	15
Weight / LBS	0.144
maximum rpm:	17000 rpm
Product Group	B00308
closure type:	Open
Cage Material	Steel
Inch - Metric	Metric
Bearing number	6304
bore diameter:	20 mm
cage material:	Steel Cage

overall width:	15 mm
Keyword String	Ball
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.591 Inch 15 Millimeter
Manufacturer URL	http://www.nskamericas.com
Long Description	20MM Bore; 52MM Outside Diameter; 15MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	2.047 Inch 52 Millimeter
Weight / Kilogram	0.07
Manufacturer Name	NSK
precision rating:	ABEC1, P0
outside diameter:	52 mm
Internal Clearance	C0-Medium
Bore Diameter (mm)	20
snap ring included:	Without Snap Ring
Outer Diameter (mm)	52
internal clearance:	C0
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
dynamic load capacity:	15900 N
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	17 000 r/min
Manufacturer Item Number	6304
Internal Special	No

Features	
(Grease) Lubrication Speed	14 000 r/min
Basic static load rating (C0)	7,9 kN
Basic dynamic load rating (C)	15,9 kN
Maximum Capacity / Filling Slot	No