


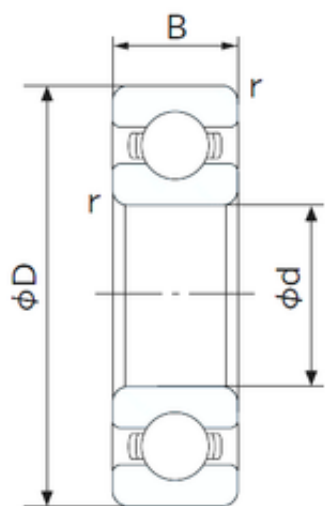

Bearing No. 6304

C	15 mm
d	20 mm
D	52 mm
B	15 mm
Bore	0.787 Inch 20 Millimeter
Noun	Bearing
Width	15 mm
Weight	0.144 Kg
r min.	1.1 mm
UNSPSC	31171504
da min.	27 mm
Da max.	45 mm
ra max.	1.1 mm
da (min)	27 mm
Da (max)	45 mm
Category	Single Row Ball Bearing
ra (max)	1.1 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Factor fo	12.4
Inventory	0.0
Bore Size	20 mm
Size (mm)	20x52x15
Snap Ring	No
Width (mm)	15
Weight / LBS	0.32
Configuration	Single Row
Inch - Metric	Metric
Cage Material	Steel

Product Group	B00308
Bearing number	6304
Other Features	Deep Groove
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outer Race Width	0.591 Inch 15 Millimeter
Long Description	20MM Bore; 52MM Outside Diameter; 15MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Radial Clearance	0.005 to 0.020 mm
Manufacturer URL	http://www.nachiamerica.com
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	2.047 Inch 52 Millimeter
Manufacturer Name	NACHI
Weight / Kilogram	0
Internal Clearance	C0-Medium
Static Load Rating	7,900 N
Bore Diameter (mm)	20
Dynamic Load Rating	15,900 N
Outer Diameter (mm)	52
Minimum Buy Quantity	N/A
Limiting Speed - Oil	17,000 rpm
Fillet Radius/Chamfer	1.1 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	14,000 rpm

Internal Special Features	No
(Grease) Lubrication Speed	13000 r/min
Basic static load rating (C0)	7,9 kN
Basic dynamic load rating (C)	15,9 kN
Maximum Capacity / Filling Slot	No