


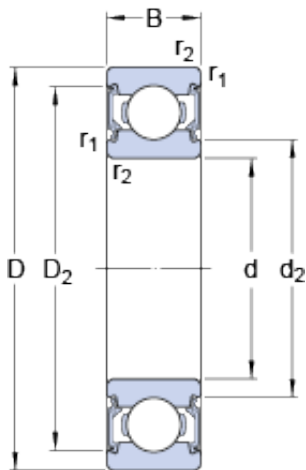

Bearing No. 6304-2RSL

D	52 mm
d	20 mm
B	15 mm
Size (mm)	52x20x15
Width (mm)	15
Mass bearing	0.15 kg
D ₂	44.71 mm
d ₂	26.9 mm
Limiting speed	15000 r/min
Bearing number	6304-2RSL
Reference speed	30000 r/min
D _a max.	45 mm
r _a max.	1 mm
Bore Diameter (mm)	52
d _a max.	27 mm
d _a min.	27 mm
Outer Diameter (mm)	20
r _{1,2} min.	1.1 mm
d _a - max.	27 mm
D _a - max.	45 mm
r _a - max.	1 mm
d _a - min.	27 mm
d ₂ ?	26.9 mm
D ₂ ?	44.71 mm
r _{1,2} - min.	1.1 mm
Basic dynamic load rating C	16.8 kN
Basic dynamic load rating - C	16.8 kN
Fatigue load limit P _u	0.335 kN

Calculation factor k_r	0.03
Calculation factor f_0	12.4
Calculation factor - f_0	12
Calculation factor - k_r	0.03
Fatigue load limit - P_u	0.335 kN
Basic static load rating C_0	7.8 kN
Basic static load rating - C_0	7.8 kN