


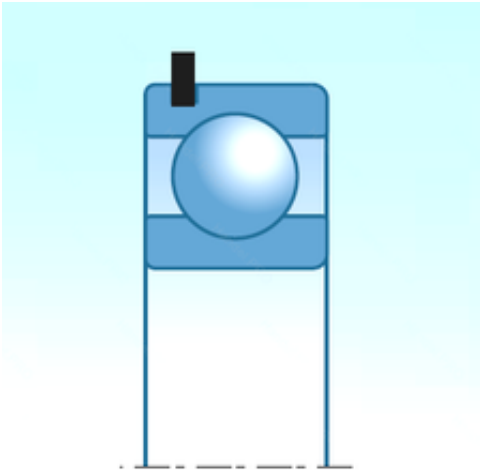

Bearing No. 6304LLUNR

D	52,000 mm
d	20,000 mm
B	15,000 mm
C	15,000 mm
Noun	Bearing
Bore	0.787 Inch 20 Millimeter
UNSPSC	31171504
series:	63
Category	Single Row Ball Bearing
Snap Ring	Yes
Enclosure	2 Seals
Size (mm)	20x52x15
Inventory	0.0
bore type:	Round
Width (mm)	15,000
maximum rpm:	17000 RPM
Weight / LBS	0.317
closure type:	Double Sealed
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
fillet radius:	1.1 mm
overall width:	15 mm
bore diameter:	20 mm
Keyword String	Ball
cage material:	Steel
Bearing number	6304LLUNR
Other Features	Deep Groove Double Lip Friction Nitrile Rubber Seal With Snap

	Ring -20 To 120 Deg C Shell Alvania Prelubricated
Enclosure Type	Contact Seal
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.ntnamerica.com
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	2.047 Inch 52 Millimeter
Long Description	20MM Bore; 52MM Outside Diameter; 15MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Outer Race Width	0.591 Inch 15 Millimeter
precision rating:	ISO Class 0
outside diameter:	52 mm
bearing material:	High Carbon Chrome Steel
Manufacturer Name	NTN
Weight / Kilogram	0
inner ring width:	15 mm
outer ring width:	15 mm
Internal Clearance	C0-Medium
Bore Diameter (mm)	20,000
snap ring included:	With Snap Ring
Outer Diameter (mm)	52,000
internal clearance:	CN

Minimum Buy Quantity	N/A
maximum rpm (grease):	10000 rpm
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	7900 N
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	15900 N
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Maximum Capacity / Filling Slot	No