


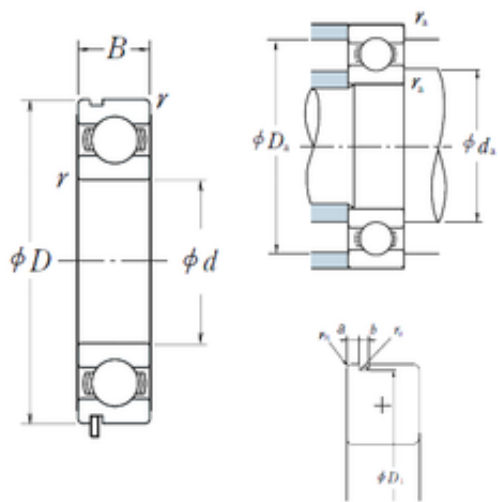

Bearing No. 6304N

a	2,46 mm
r	1.1
d	20 mm
D	52 mm
B	15 mm
C	15 mm
b	1,35 mm
fo	12.4
B_	15
ra	1
C0	7.9
D1	49,73 mm
D_	52
Z_	7
rn	0,5 mm
ro	0.4
DE_	45.525
SRI	4.81
D_a	45.5
DA_	9.525
SRE	5
DI_	26.475
yobi	6304N
mass	0.145
SBRG	3
bomp	0
KBRG	6101
SREX	0.04
SREN	0
SRIN	0

SDM_	36
SRIX	0.02
ALPHA_	0
r min.	1,1 mm
C_conv	15900
da max	28 mm
da min	26.5
Weight	0,145 Kg
LangID	1
ra max.	1 mm
Da max.	45,5 mm
Oil rpm	17000
da min.	26,5 mm
r0 max.	0,4 mm
hidYobi	6304N
GRS rpm	14000
hidTable	ecat_NSRDGB
Size (mm)	20x52x15
Prod_Type3	DGBB_SR_N_OT
Width (mm)	15
Bearing number	6304N
Bore Diameter (mm)	20
Outer Diameter (mm)	52
(Oil) Lubrication Speed	17 000 r/min
(Grease) Lubrication Speed	14 000 r/min
Basic dynamic load rating (C)	15,9 kN
Basic static load rating (C0)	7,9 kN