


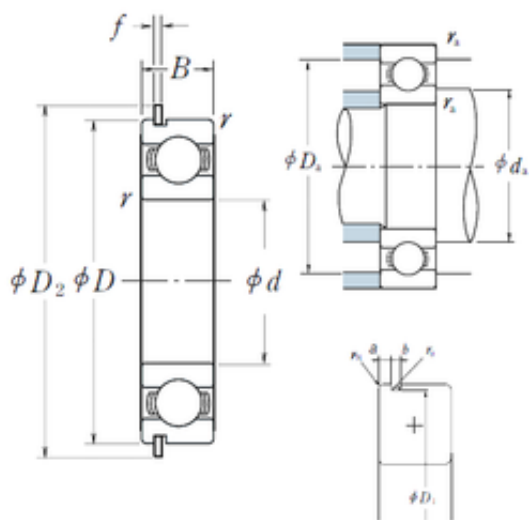

Bearing No. 6304NR

a	2,46 mm
d	20 mm
D	52 mm
B	15 mm
C	15 mm
r	1.1
b	1,35 mm
f	1,12 mm
D_	52
C0	7.9
ro	0.4
fo	12.4
D1	49,73 mm
D2	57,9 mm
Dx	58.5
rn	0,5 mm
B_	15
Z_	7
Cy	3.3
ra	1
D_a	45.5
DI_	26.475
SRI	4.81
DA_	9.525
SRE	5
DE_	45.525
SRIX	0.02
Bore	0.787 Inch 20 Millimeter
SRIN	0

Noun	Bearing
SREX	0.04
SREN	0
mass	0.145
bomp	0
SBRG	3
KBRG	6101
yobi	6304NR
SDM_	36
C_conv	15900
da min	26.5
r min.	1,1 mm
LangID	1
da max	28 mm
ALPHA_	0
Weight	0,145 Kg
UNSPSC	31171504
da min.	26,5 mm
r0 max.	0,4 mm
Oil rpm	17000
GRS rpm	14000
ra max.	1 mm
Da max.	45,5 mm
hidYobi	6304NR
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Size (mm)	20x52x15
Inventory	0.0
Snap Ring	Yes
Enclosure	Open
Width (mm)	15
Prod_Type3	DGBB_SR_NR_OT

Weight / LBS	0.147
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Bearing number	6304NR
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.591 Inch 15 Millimeter
Outside Diameter	2.047 Inch 52 Millimeter
Long Description	20MM Bore; 52MM Outside Diameter; 15MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	0.07
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	20
Outer Diameter (mm)	52
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	17 000 r/min
Manufacturer Item Number	6304NR
Internal Special Features	No
(Grease) Lubrication Speed	14 000 r/min

Basic static load rating (C0)	7,9 kN
Basic dynamic load rating (C)	15,9 kN
Maximum Capacity / Filling Slot	No