


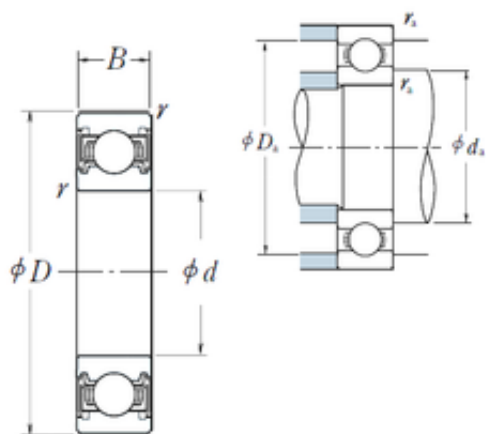

Bearing No. 6304VV

D	52 mm
d	20 mm
B	15 mm
C	15 mm
r	1.1
Z_	7
B_	15
D_	52
ra	1
C0	7.9
fo	12.4
DI_	26.475
SRI	4.81
D_a	45.5
DE_	45.525
DA_	9.525
SRE	5
SRIN	0
SBRG	3
yobi	6304VV
SDM_	36
SREX	0.04
KBRG	6151
bomp	0
mass	0.145
Bore	0.787 Inch 20 Millimeter
SRIX	0.02
SREN	0
Noun	Bearing

ALPHA_	0
da min	26.5
LangID	1
r min.	1,1 mm
UNSPSC	31171504
da max	28 mm
C_conv	15900
Weight	0,145 Kg
ra max.	1 mm
hidYobi	6304VV
GRS rpm	14000
da min.	26,5 mm
Da max.	45,5 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Size (mm)	20x52x15
Enclosure	2 Seals
Inventory	0.0
Width (mm)	15
Prod_Type3	DGBB_SR_VV
Weight / LBS	0.144
Cage Material	Steel
Product Group	B00308
Inch - Metric	Metric
Bearing number	6304VV
Keyword String	Ball
Enclosure Type	Non-Contact Seal
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.591 Inch 15 Millimeter
Outside Diameter	2.047 Inch 52

	Millimeter
Long Description	20MM Bore; 52MM Outside Diameter; 15MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	0.07
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	20
Outer Diameter (mm)	52
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6304VV
Internal Special Features	No
(Grease) Lubrication Speed	14 000 r/min
Basic static load rating (C0)	7,9 kN
Basic dynamic load rating (C)	15,9 kN
Maximum Capacity / Filling Slot	No