


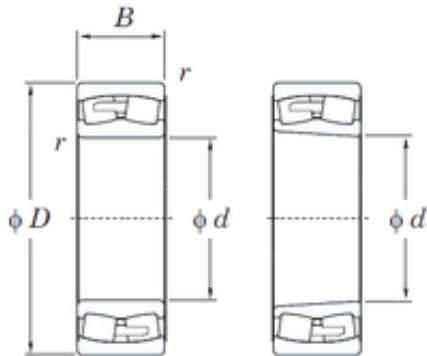

Bearing No. 24176RHA

|                        |             |
|------------------------|-------------|
| D                      | 620 mm      |
| d                      | 380 mm      |
| B                      | 243 mm      |
| C                      | 243 mm      |
| e                      | 0.38        |
| Cu                     | 561         |
| Y1                     | 1.78        |
| Y0                     | 1.74        |
| Y2                     | 2.65        |
| Cr                     | 5870        |
| C0r                    | 9840        |
| r(min)                 | 5           |
| Weight                 | 288 Kg      |
| r min.                 | 5 mm        |
| ra max.                | 4 mm        |
| Da max.                | 598 mm      |
| ra(max)                | 4           |
| Da(max)                | 598         |
| da(min)                | 402         |
| da min.                | 402 mm      |
| Oil lub.               | 560         |
| Size (mm)              | 380x620x243 |
| Width (mm)             | 243         |
| Grease lub.            | 420         |
| Bearing No.            | 24176RHA    |
| Bearing number         | 24176RHA    |
| (Refer.)Mass(kg)       | 288         |
| Bore Diameter (mm)     | 380         |
| Outer Diameter (mm)    | 620         |
| Calculation factor (e) | 0,38        |
|                        |             |

|                               |           |
|-------------------------------|-----------|
| Calculation factor (Y1)       | 1,78      |
| Calculation factor (Y0)       | 1,74      |
| (Oil) Lubrication Speed       | 560 r/min |
| (Grease) Lubrication Speed    | 420 r/min |
| Basic static load rating (C0) | 9840 kN   |
| Basic dynamic load rating (C) | 4830 kN   |