


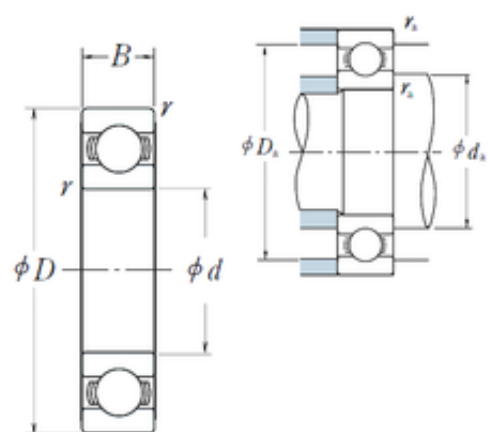

Bearing No. 16034

r	1.5
d	170 mm
D	260 mm
B	28 mm
C	28 mm
C0	126
Z_	18
ra	1.5
B_	28
D_	260
fo	16.5
D_a	252
SRE	10.68
DE_	235.638
DA_	20.638
DI_	194.362
SRI	10.68
mass	5.71
SRIN	-0.04
SBRG	0
SRIX	0.04
KBRG	6104
SREN	-0.04
yobi	16034
bomp	0
SREX	0.04
SDM_	215
r min.	1,5 mm
ALPHA_	0
da min	178

C_conv	114000
Weight	5,71 Kg
LangID	1
Oil rpm	2600
GRS rpm	2200
hidYobi	16034
ra max.	1,5 mm
Da max.	246 mm
da min.	186 mm
hidTable	ecat_NSRDGB
Size (mm)	170x260x28
Prod_Type3	DGBB_SR_OT
Width (mm)	28
Bearing number	16034
Bore Diameter (mm)	170
Outer Diameter (mm)	260
Basic static load rating (C0)	126 kN
Basic dynamic load rating (C)	114 kN