


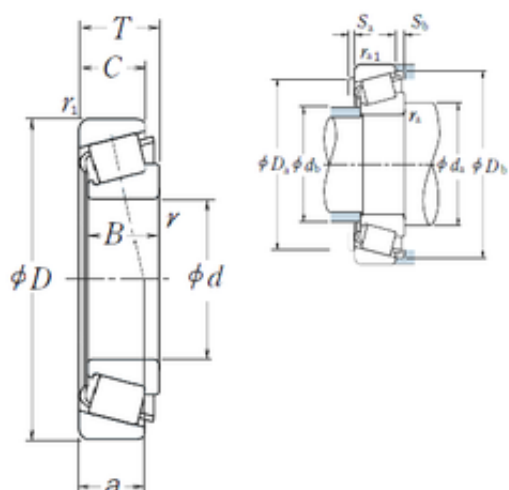

Bearing No. T2ED045

D	95 mm
d	45 mm
T	36 mm
B	35 mm
C	30 mm
a	23,5 mm
e	0.32
Cr	14200
Y0	1.02
db	54
da	60
Y1	1.9
B_	35
Sb	6
C0	174
Sa	5
D_	95
Z_	16
C_	30
C0r	17800
DA_	12.473
Iso	2ED
DE_	82.171
D_b	89
DI_	57.463
SBRG	2ED
SDM_	69.817
D_a2	79
KBRG	3111
yobi	T2ED045

D_a1	83
mass	1.22
TC-RA	207.8
r min.	2,5 mm
Weight	1,22 Kg
TC-DA1	13.295
TC-DA2	11.651
TC-SLR	25.8
Da min	79 mm
LangID	1
ALPHA_	12.15
Db min.	89 mm
Oil rpm	5300
db max.	54 mm
Da max.	83 mm
ra max.	2 mm
hidYobi	T2ED045
da min.	60 mm
T-ALP21	24
rb max.	2 mm
T-ALP22	18
T-ALP23	0
GRS rpm	4000
inner r	2.5
outer r	2.5
r1 min.	2,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	3
inner ra	2
outer rb	2
TC-BET22	40

Size (mm)	45x95x36
Width (mm)	36
Prod_Type3	TRBSR_MD_A
Bearing number	T2ED045
Bore Diameter (mm)	45
Outer Diameter (mm)	95
Calculation factor (e)	0,32
Calculation factor (Y0)	1,02
(Oil) Lubrication Speed	5300 r/min
(Grease) Lubrication Speed	4000 r/min
Basic dynamic load rating (C)	139 kN
Basic static load rating (C0)	174 kN