


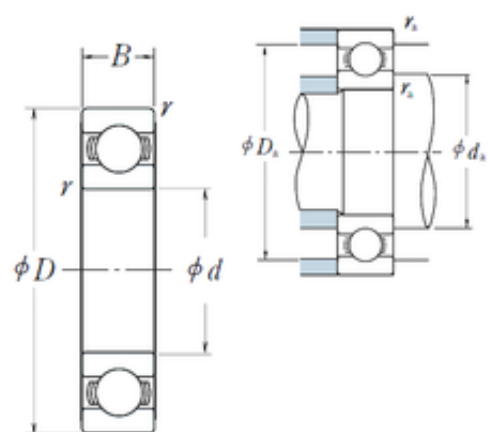

Bearing No. 16060

r	4
d	300 mm
D	460 mm
B	50 mm
C	50 mm
C0	405
Z_	17
ra	3
B_	50
D_	460
fo	16.4
D_a	444
SRE	19.72
DE_	418.1
DA_	38.1
DI_	341.9
SRI	19.72
mass	31.5
SRIN	-0.065
SBRG	0
SRIX	0.065
KBRG	6104
SREN	-0.065
yobi	16060
bomp	0
SREX	0.065
SDM_	380
r min.	4 mm
ALPHA_	0
da min	316

C_conv	285000
Weight	31,5 Kg
LangID	1
Oil rpm	1400
GRS rpm	1200
hidYobi	16060
ra max.	3 mm
Da max.	435 mm
da min.	329 mm
hidTable	ecat_NSRDGB
Size (mm)	300x460x50
Prod_Type3	DGBB_SR_OT
Width (mm)	50
Bearing number	16060
Bore Diameter (mm)	300
Outer Diameter (mm)	460
Basic static load rating (C0)	405 kN
Basic dynamic load rating (C)	285 kN