


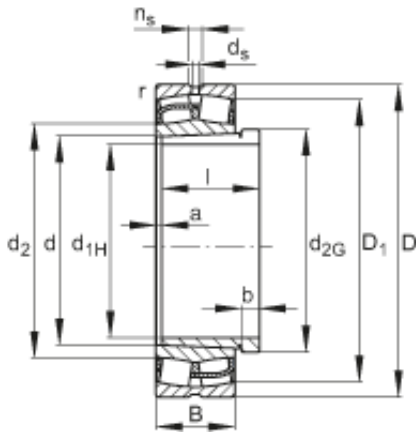

Bearing No. 24160-E1-K30 + AH24160

	AH24160 / Designation, withdrawal sleeve
l	224 mm
a	18 mm
m	161 kg / Weight
d	300 mm
e	0,39
b	24 mm
B	200 mm
D	500 mm
Size (mm)	280x500x200
Width (mm)	200
Y_2	2,56
Y_1	1,72
Y_0	1,68
C_r	3950000 N
m_1	20,1 kg / Weight, withdrawal sleeve
n_G	1100 1/min / Limiting speed
n_B	455 1/min / Reference speed
d_s	8 mm
n_s	15 mm
d_2	338,2 mm
D_1	422,8 mm
d_{2G}	Tr320X5
d_{1H}	280 mm
C_{0r}	6400000 N / Static load rating (radial)

Bearing number	24160-E1-K30 + AH24160
r_{min}	5 mm
$r_{a\ max}$	4 mm
$d_{a\ min}$	320 mm
$D_{a\ max}$	480 mm
Bore Diameter (mm)	280
Outer Diameter (mm)	500