


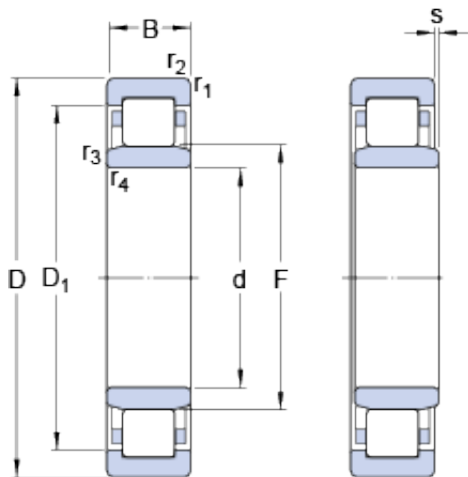

Bearing No. NU 2319 ECML

s	6.9 mm
d	95 mm
D	200 mm
B	67 mm
F	121.5 mm
s max.	6.9 mm
Size (mm)	200x95x67
Width (mm)	67
Mass bearing	10.7 kg
D_1	169.1 mm
Limiting speed	6300 r/min
Bearing number	NU 2319 ECML
Reference speed	3600 r/min
Limiting value e	0.3
d_a max.	118 mm
d_a min.	110 mm
Bore Diameter (mm)	200
r_a max.	2.5 mm
D_a max.	185 mm
r_b max.	2.5 mm
d_b min.	125 mm
Axial load factor Y	0.4
Outer Diameter (mm)	95
r_b - max.	2.5 mm
r_a - max.	2.5 mm
$r_{1,2}$ min.	3 mm
d_a - min.	110 mm
D_a - max.	185 mm
d_b - min.	125 mm
d_a - max.	118 mm

$r_{3,4}$ min.	3 mm
D_1 ?	169.1 mm
$r_{3,4}$ - min.	3 mm
$r_{1,2}$ - min.	3 mm
Basic dynamic load rating C	530 kN
Basic dynamic load rating - C	530 kN
Fatigue load limit P_u	69.5 kN
Calculation factor k_r	0.38
Calculation factor - k_r	0.38
Fatigue load limit - P_u	69.5 kN
Basic static load rating C_0	585 kN
Basic static load rating - C_0	585 kN