


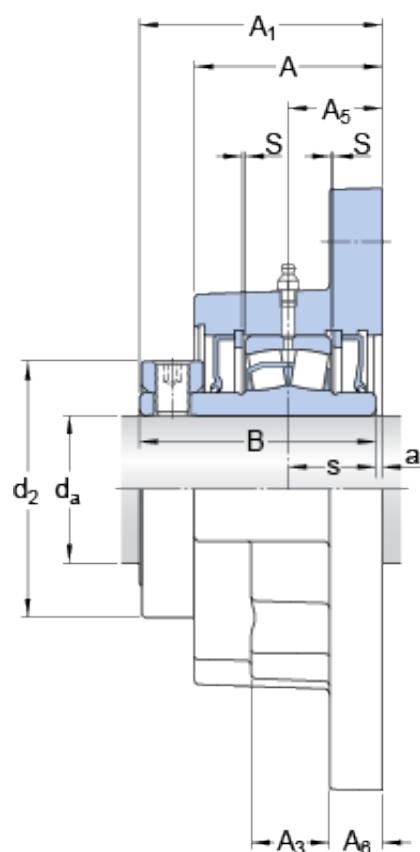

Bearing No. FYR 2 3/4

|                     |                      |
|---------------------|----------------------|
| L                   | 241.3 mm             |
| a                   | 6.35 mm              |
| S                   | 0.794 mm             |
| A                   | 73.025 mm            |
| s                   | 31.75 mm             |
| J                   | 200.025 mm           |
| B                   | 92.075 mm            |
| Size (mm)           | 69.85x111.125x73.025 |
| Width (mm)          | 73,025               |
| da                  | 69.85 mm             |
| A3                  | 30.163 mm            |
| A5                  | 37.306 mm            |
| N1                  | 20.638 mm            |
| A6                  | 23.812 mm            |
| A1                  | 97.631 mm            |
| A5                  | 37.306 mm            |
| A3                  | 30.162 mm            |
| A1                  | 97.631 mm            |
| d2                  | 111.125 mm           |
| da                  | 69.85 mm             |
| A6                  | 23.813 mm            |
| N1                  | 20.637 mm            |
| d2                  | 111.125 mm           |
| Bearing number      | FYR 2 3/4            |
| Limiting speed      | 2800 r/min           |
| Mass bearing unit   | 12.2 kg              |
| Bore Diameter (mm)  | 69,85                |
| Outer Diameter (mm) | 111,125              |
| Attachment bolt     | 19.05 mm             |

|                               |        |
|-------------------------------|--------|
| diameter G                    |        |
| Basic dynamic load rating C   | 158 kN |
| Basic dynamic load rating - C | 158 kN |