


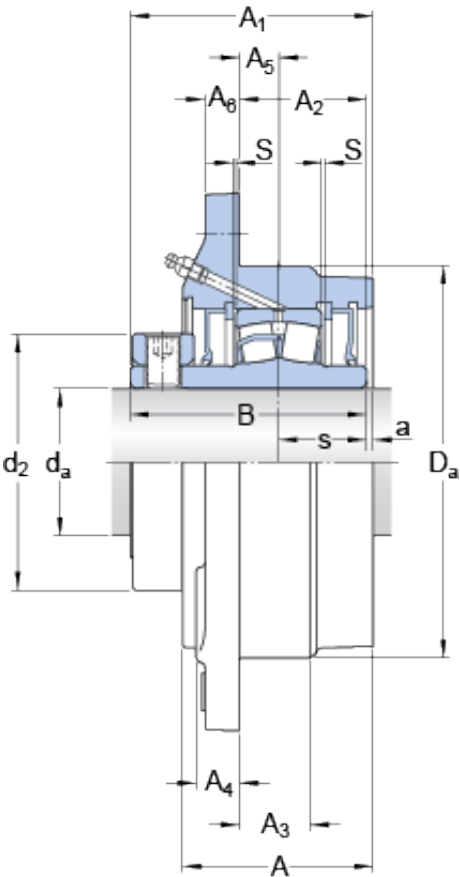

Bearing No. FYRP 3 1/2

|                |                      |
|----------------|----------------------|
| L              | 260.35 mm            |
| a              | 4.762 mm             |
| A              | 80.962 mm            |
| S              | 0.794 mm             |
| s              | 36.512 mm            |
| J              | 219.075 mm           |
| B              | 102.394 mm           |
| Size (mm)      | 88.9x130.175x187.325 |
| Width (mm)     | 187,325              |
| A <sub>1</sub> | 106.362 mm           |
| D <sub>a</sub> | 187.325 mm           |
| d <sub>2</sub> | 130.175 mm           |
| d <sub>a</sub> | 88.9 mm              |
| A <sub>4</sub> | 26.988 mm            |
| A <sub>5</sub> | 13.494 mm            |
| N <sub>1</sub> | 20.638 mm            |
| A <sub>6</sub> | 22.225 mm            |
| A <sub>3</sub> | 31.75 mm             |
| A <sub>5</sub> | 13.494 mm            |
| A <sub>4</sub> | 26.988 mm            |
| A <sub>3</sub> | 31.75 mm             |
| A <sub>2</sub> | 49.212 mm            |
| A <sub>1</sub> | 106.362 mm           |
| D <sub>a</sub> | 187.325 mm           |
| d <sub>2</sub> | 130.175 mm           |
| d <sub>a</sub> | 88.9 mm              |
| A <sub>6</sub> | 22.225 mm            |
| N <sub>1</sub> | 20.637 mm            |
|                |                      |

|                               |            |
|-------------------------------|------------|
| A <sub>2</sub>                | 49.212 mm  |
| Bearing number                | FYRP 3 1/2 |
| Limiting speed                | 2300 r/min |
| Mass bearing unit             | 13.2 kg    |
| Bore Diameter (mm)            | 88,9       |
| Outer Diameter (mm)           | 130,175    |
| Attachment bolt diameter G    | 19.05 mm   |
| Basic dynamic load rating C   | 253 kN     |
| Basic dynamic load rating - C | 253 kN     |