


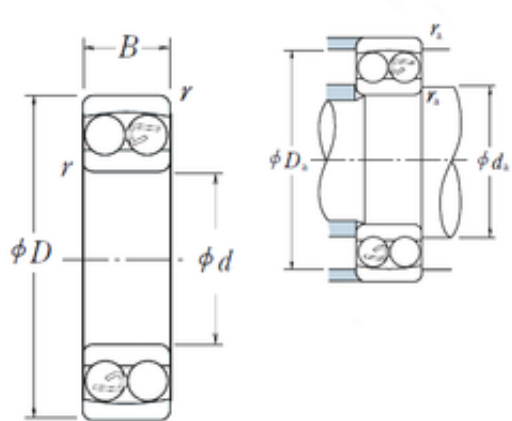

Bearing No. 135

r	0.3
d	5 mm
D	19 mm
B	6 mm
C	6 mm
e	0.34
D_	19
X0	1
B_	6
Y2	2.9
X1	1
da	7
X2	0.65
Y3	1.9
ra	0.3
Y0	1.9
C0	0.475
D_a	17
PCD	12.5
SRI	1.67
SRE	0
SRIN	0
SRIX	0.03
mass	0.009
Noun	Bearing
Bore	0.197 Inch 5 Millimeter
yobi	135
CAng	12.735
KBRG	1352
SREX	0

SREN	0
LangID	1
r min.	0,3 mm
Weight	0,009 Kg
UNSPSC	31171532
Oil rpm	36000
da min.	7 mm
GRS rpm	30000
Da max.	17 mm
ra max.	0,3 mm
hidYobi	135
cyl dia	3.175
hidTable	ecat_NSSAB
Category	Self Aligning Ball Bearings
Enclosure	Open
Size (mm)	5x19x6
Inventory	0.0
cyl count	8
Prod_Type3	SABB_SA_CB
Width (mm)	6
Weight / LBS	0.01984
groove inner	9.321
groove outer	15.99
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00152
Bearing number	135
Other Features	Allowable Misalignment 3 Deg
Keyword String	Self Aligning
Precision Class	ABEC 1 ISO P0
Mounting Method	Shaft

Rolling Element	Ball Bearing
Inner Race Width	0.236 Inch 6 Millimeter
Outside Diameter	0.748 Inch 19 Millimeter
Manufacturer URL	http://www.nskamericas.com
Long Description	5MM Bore; Shaft Mount; 19MM Outside Diameter; 6MM Inner Race Width; 6MM Outer Race Width; Open; Steel Cage; Double Row of Balls; ABEC 1 ISO P0; C0-Medium
Outer Race Width	0.236 Inch 6 Millimeter
Weight / Kilogram	0.009
Manufacturer Name	NSK
Bore Diameter (mm)	5
Internal Clearance	C0-Medium
Outer Diameter (mm)	19
Minimum Buy Quantity	N/A
Calculation factor (e)	0,34
Harmonized Tariff Code	8482.10.50.68
Calculation factor (Y2)	2,9
Number of Rows of Balls	Double Row
(Oil) Lubrication Speed	36 000 r/min
Calculation factor (Y0)	1,9
(Grease) Lubrication Speed	30 000 r/min
Basic static load rating (C0)	0,475 kN
Basic dynamic load rating (C)	2,53 kN