


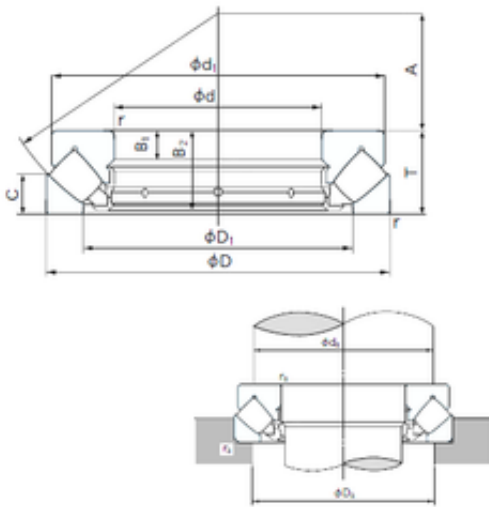

Bearing No. 29488E

C	100 mm
B	74 mm
d	440 mm
D	780 mm
T	206 mm
A	260 mm
B1	74 mm
D1	588 mm
d1	745 mm
B2	199 mm
Width	206 mm
r min.	9.5 mm
Weight	421 Kg
da min.	595 mm
Da max.	670 mm
ra max.	8 mm
da (min)	595 mm
Da (max)	670 mm
ra (max)	8 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Bore Size	440 mm
Size (mm)	440x780x206
Width (mm)	206
Configuration	Single Row
Bearing number	29488E
Outside Diameter	780 mm
Static Load Rating	30,000,000 N
Bore Diameter (mm)	440
Dynamic Load Rating	6,950,000 N

Outer Diameter (mm)	780
Limiting Speed - Oil	300 rpm
Fillet Radius/Chamfer	9.5 mm
Basic dynamic load rating (C)	6950 kN
Basic static load rating (C0)	30000 kN