


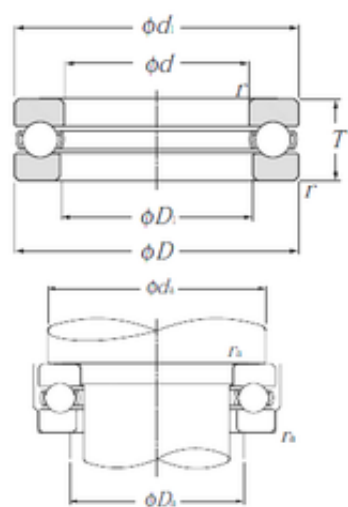

Bearing No. 51213

D	100 mm
d	65 mm
T	27 mm
D1	67 mm
d1	100 mm
Noun	Bearing
Bore 1	2.559 Inch 65 Millimeter
Bore 2	2.638 Inch 67 Millimeter
UNSPSC	31171552
Weight	0,767 Kg
r min.	1 mm
Height	1.063 Inch 27 Millimeter
Banded	No
Da max.	79 mm
ra max.	1 mm
da min.	86 mm
Category	Thrust Ball Bearings
Size (mm)	65x100x27
Inventory	0.0
Width (mm)	27
maximum rpm:	2700 rpm
Weight / LBS	1.69095
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Keyword String	Ball Thrust
Other Features	Single Row With Flat Seat

bore diameter:	65 mm
Bearing number	51213
overall width:	27 mm
fillet radius:	1 mm
cage material:	Steel
Thrust Bearing	Yes
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outside Diameter	3.937 Inch 100 Millimeter
Manufacturer URL	http://www.ntnamerica.com
Long Description	65MM Bore 1; 67MM Bore 2; 100MM Outside Diameter; 27MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; ABEC 1 ISO P0 Precision
bearing material:	High Carbon Chrome Steel
Weight / Kilogram	0.744
outside diameter:	100 mm
Manufacturer Name	NTN
precision rating:	ISO Class 0
Bore Diameter (mm)	65
Outer Diameter (mm)	100
Minimum Buy Quantity	N/A
separable or banded:	Separable
thrust bearing type:	Single-Direction
Component Description	Roller Assembly Plus Raceways
static load capacity:	189000 N
dynamic load capacity:	75000 N
Harmonized Tariff Code	8482.10.50.08

Manufacturer Item Number	51213
outside diameter design:	Straight
Single or Double Direction	Single Direction
(Grease) Lubrication Speed	1 900 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	189 kN
Basic dynamic load rating (C)	75 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter