


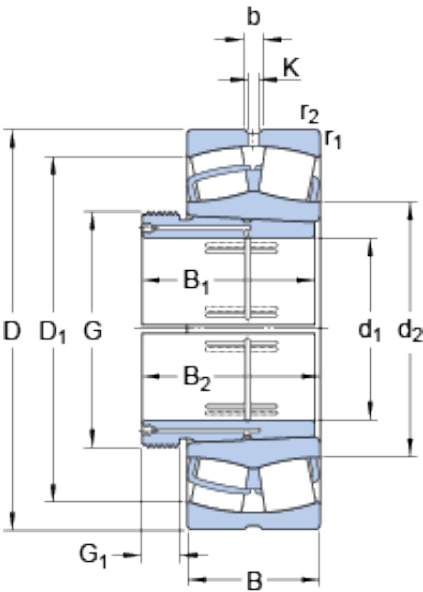

Bearing No. 22344 CCK/W33 + AOH 2344

D	460 mm
B	145 mm
b	22.3 mm
K	12 mm
G	Tr 240x4
Size (mm)	460x200x145
Width (mm)	145
D ₁	389 mm
G ₁	30 mm
G ₁	30 mm
B ₁	181 mm
d ₁	200 mm
d ₂	279 mm
B ₁	181 mm
B ₂	189 mm
d ₁	200 mm
Bearing number	22344 CCK/W33 + AOH 2344
Limiting speed	1400 r/min
Reference speed	1000 r/min
D _a max.	440 mm
r _a max.	4 mm
d _a min.	231 mm
Bore Diameter (mm)	460
Outer Diameter (mm)	200
r _a - max.	4 mm
Calculation factor e	0.31
D _a - max.	440 mm
d _a - min.	231 mm

$r_{1,2}$ min.	5 mm
B_2 ?	189 mm
D_1 ?	389 mm
d_2 ?	279 mm
Mass bearing + sleeve	130 kg
$r_{1,2}$ - min.	5 mm
Calculation factor - e	0.31
Basic dynamic load rating C	2839 kN
Basic dynamic load rating - C	2839 kN
Fatigue load limit P_u	260 kN
Calculation factor Y_1	2.2
Calculation factor Y_2	3.3
Calculation factor Y_0	2.2
Calculation factor - Y_2	3.3
Calculation factor - Y_1	2.2
Fatigue load limit - P_u	260 kN
Basic static load rating C_0	3450 kN
Basic static load rating - C_0	3450 kN