


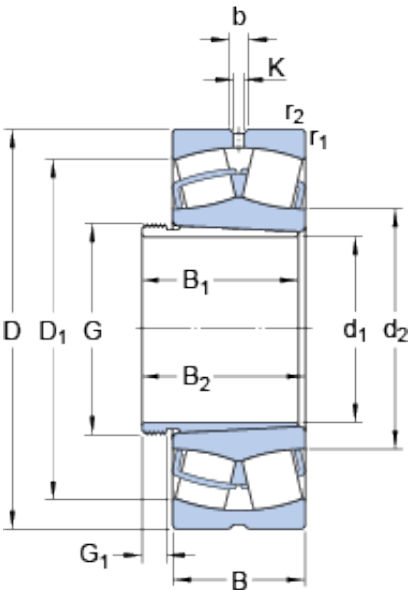

Bearing No. 23028 CCK/W33 + AHX 3028

D	210 mm
B	53 mm
b	8.3 mm
K	4.5 mm
G	M 150x2
Size (mm)	210x135x53
Width (mm)	53
d ₂	158 mm
G ₁	150 mm
G ₁	14 mm
B ₁	68 mm
d ₁	135 mm
D ₁	190 mm
B ₁	68 mm
d ₁	135 mm
Bearing number	23028 CCK/W33 + AHX 3028
Limiting speed	3400 r/min
Reference speed	2600 r/min
D _a max.	201 mm
r _a max.	2 mm
d _a min.	145 mm
Bore Diameter (mm)	210
Outer Diameter (mm)	135
r _a - max.	2 mm
Calculation factor e	0.22
D _a - max.	201 mm
d _a - min.	145 mm
r _{1,2} min.	2 mm
	73 mm

B ² ?	
------------------	--

D_1 ?	190 mm
d_2 ?	158 mm
Mass bearing + sleeve	7.35 kg
$r_{1,2}$ - min.	2 mm
Calculation factor - e	0.22
Basic dynamic load rating C	485 kN
Basic dynamic load rating - C	485 kN
Fatigue load limit P_u	68 kN
Calculation factor Y_1	3
Calculation factor Y_2	4.6
Calculation factor Y_0	2.8
Calculation factor - Y_2	4.6
Calculation factor - Y_1	3
Fatigue load limit - P_u	68 kN
Basic static load rating C_0	680 kN
Basic static load rating - C_0	680 kN