


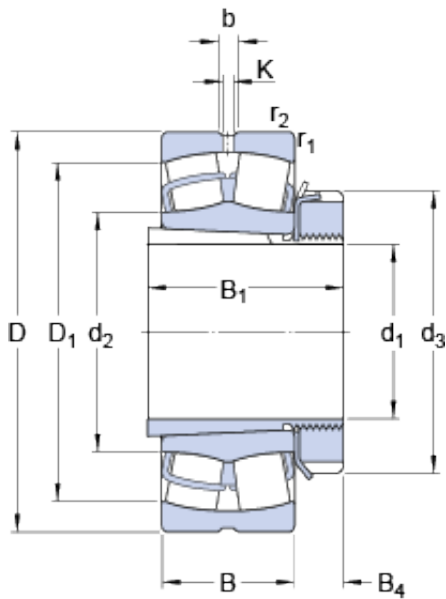

Bearing No. 23036 CCK/W33 + H 3036

D	280 mm
B	74 mm
b	13.9 mm
K	7.5 mm
Size (mm)	280x160x74
Width (mm)	74
d ₃	210 mm
d ₁	160 mm
B ₄	29.5 mm
B ₁	109 mm
d ₁	160 mm
d ₂	204 mm
D ₁	249 mm
B ₁	109 mm
B ₄	29.5 mm
d ₃	210 mm
Bearing number	23036 CCK/W33 + H 3036
Limiting speed	2600 r/min
Reference speed	2000 r/min
Bore Diameter (mm)	280
r _a max.	2 mm
B _a min.	9 mm
D _a max.	269 mm
d _b min.	189 mm
d _a max.	204 mm
Outer Diameter (mm)	160
Calculation factor e	0.24
r _{1,2} min.	2.1 mm

r_a - max.	2 mm
B_a - min.	9 mm
D_a - max.	269 mm
d_b - min.	189 mm
d_a - max.	204 mm
d_2 ?	204 mm
Mass bearing + sleeve	23.2 kg
D_1 ?	249 mm
Calculation factor - e	0.24
$r_{1,2}$ - min.	2.1 mm
Basic dynamic load rating C	883 kN
Basic dynamic load rating - C	883 kN
Fatigue load limit P_u	114 kN
Calculation factor Y_1	2.8
Calculation factor Y_2	4.2
Calculation factor Y_0	2.8
Calculation factor - Y_1	2.8
Calculation factor - Y_2	4.2
Fatigue load limit - P_u	114 kN
Basic static load rating C_0	1250 kN
Basic static load rating - C_0	1250 kN