


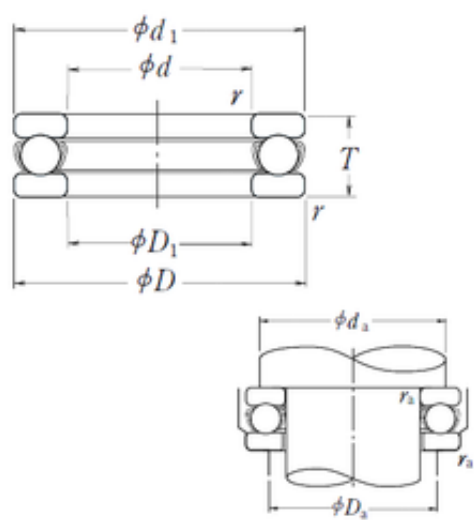

Bearing No. 51318

C	214
r	1.5
d	90 mm
D	155 mm
T	50 mm
Z_	15
D_	155
ra	1.5
B_	50
da	129
C0	525
D1	93 mm
T_	50
d1	155 mm
D_1	93
SRI	12.9
SRE	12.9
DA_	23.812
D_a	116
KBRG	5111
SREX	0.08
mass	3.83
Noun	Bearing
SRIN	0
SRIX	0.08
SREN	0
yobi	51318
SDM_	122.5
Banded	No
Weight	3,83 Kg

r min.	1,5 mm
LangID	1
UNSPSC	31171552
Bore 2	3.661 Inch 93 Millimeter
Bore 1	3.543 Inch 90 Millimeter
Height	1.969 Inch 50 Millimeter
ra max.	1,5 mm
hidYobi	51318
Oil rpm	1700
da min.	129 mm
Da max.	116 mm
GRS rpm	1100
hidTable	ecat_NSSDTB
Category	Thrust Ball Bearings
Size (mm)	90x155x50
Inventory	0.0
Width (mm)	50
Prod_Type3	TB_SD_WFS
Weight / LBS	8.4437
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
Bearing number	51318
Keyword String	Ball Thrust
Other Features	Single Row With Flat Seat
Thrust Bearing	Yes
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Manufacturer URL	http://www.nskamericas.com

Outside Diameter	6.102 Inch 155 Millimeter
Long Description	90MM Bore 1; 93MM Bore 2; 155MM Outside Diameter; 50MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non- Precision
Manufacturer Name	NSK
Weight / Kilogram	2.235
Bore Diameter (mm)	90
Outer Diameter (mm)	155
Minimum Buy Quantity	N/A
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
Manufacturer Item Number	51318
Single or Double Direction	Single Direction
(Grease) Lubrication Speed	1100 r/min
Basic static load rating (C0)	525 kN
Basic dynamic load rating (C)	214 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter