


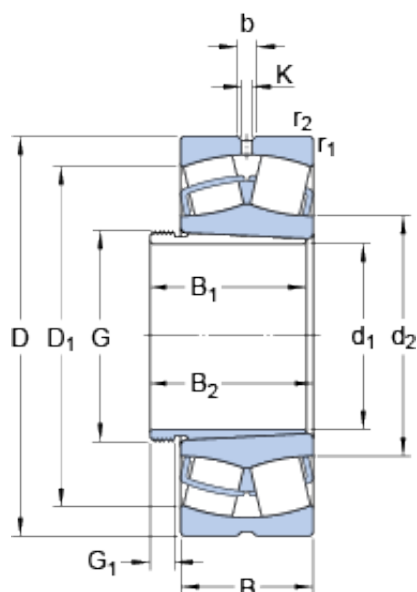

Bearing No. 23122 CCK/W33 + AHX 3122

D	180 mm
B	56 mm
b	8.3 mm
K	4.5 mm
G	M 120x2
Size (mm)	180x105x56
Width (mm)	56
d ₂	126 mm
G ₁	120 mm
G ₁	11 mm
B ₁	68 mm
d ₁	105 mm
D ₁	157 mm
B ₁	68 mm
d ₁	105 mm
Bearing number	23122 CCK/W33 + AHX 3122
Limiting speed	3600 r/min
Reference speed	2800 r/min
D _a max.	169 mm
r _a max.	2 mm
d _a min.	118 mm
Bore Diameter (mm)	180
Outer Diameter (mm)	105
r _a - max.	2 mm
Calculation factor e	0.3
D _a - max.	169 mm
d _a - min.	118 mm
r _{1,2} min.	2 mm
	72 mm

B ² ?	
------------------	--

D_1 ?	157 mm
d_2 ?	126 mm
Mass bearing + sleeve	6.35 kg
$r_{1,2}$ - min.	2 mm
Calculation factor - e	0.3
Basic dynamic load rating C	450 kN
Basic dynamic load rating - C	450 kN
Fatigue load limit P_u	61 kN
Calculation factor Y_1	2.3
Calculation factor Y_2	3.4
Calculation factor Y_0	2.2
Calculation factor - Y_2	3.4
Calculation factor - Y_1	2.3
Fatigue load limit - P_u	61 kN
Basic static load rating C_0	585 kN
Basic static load rating - C_0	585 kN