


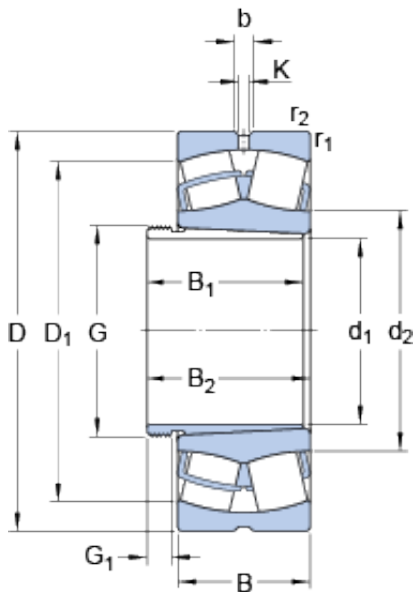

Bearing No. 23126 CCK/W33 + AHX 3126

D	210 mm
B	64 mm
b	8.3 mm
K	4.5 mm
G	M 140x2
Size (mm)	210x125x64
Width (mm)	64
d ₂	148 mm
G ₁	140 mm
G ₁	12 mm
B ₁	78 mm
d ₁	125 mm
D ₁	184 mm
B ₁	78 mm
d ₁	125 mm
Bearing number	23126 CCK/W33 + AHX 3126
Limiting speed	3200 r/min
Reference speed	2400 r/min
D _a max.	199 mm
r _a max.	2 mm
d _a min.	138 mm
Bore Diameter (mm)	210
Outer Diameter (mm)	125
r _a - max.	2 mm
Calculation factor e	0.28
D _a - max.	199 mm
d _a - min.	138 mm
r _{1,2} min.	2 mm
	82 mm

B ² ?	
------------------	--

D_1 ?	184 mm
d_2 ?	148 mm
Mass bearing + sleeve	9.6 kg
$r_{1,2}$ - min.	2 mm
Calculation factor - e	0.28
Basic dynamic load rating C	586 kN
Basic dynamic load rating - C	586 kN
Fatigue load limit P_u	78 kN
Calculation factor Y_1	2.4
Calculation factor Y_2	3.6
Calculation factor Y_0	2.5
Calculation factor - Y_2	3.6
Calculation factor - Y_1	2.4
Fatigue load limit - P_u	78 kN
Basic static load rating C_0	780 kN
Basic static load rating - C_0	780 kN