


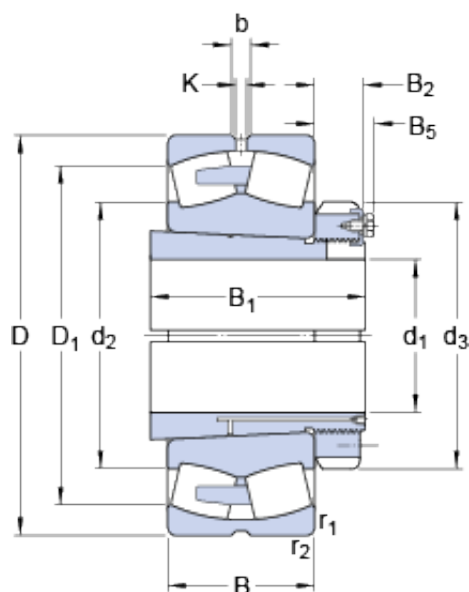

Bearing No. 23284 CAK/W33 + OH 3284 H

K	12 mm
b	22.3 mm
D	760 mm
B	272 mm
Size (mm)	760x400x272
Width (mm)	272
D ₁	649 mm
B ₁	352 mm
B ₅	90 mm
B ₂	70 mm
d ₃	540 mm
B ₁	352 mm
d ₁	400 mm
d ₂	526 mm
d ₁	400 mm
B ₂	70 mm
B ₅	90 mm
d ₃	540 mm
Bearing number	23284 CAK/W33 + OH 3284 H
Limiting speed	630 r/min
Reference speed	450 r/min
Bore Diameter (mm)	760
r _a max.	6 mm
B _a min.	16 mm
D _a max.	728 mm
d _b min.	446 mm
d _a max.	526 mm
Outer Diameter (mm)	400

d_a - max.	526 mm
Calculation factor e	0.35
$r_{1,2}$ min.	7.5 mm
r_a - max.	6 mm
B_a - min.	16 mm
D_a - max.	728 mm
d_b - min.	446 mm
D_1 ?	649 mm
d_2 ?	526 mm
Mass bearing + sleeve	590 kg
Calculation factor - e	0.35
$r_{1,2}$ - min.	7.5 mm
Basic dynamic load rating C	7677 kN
Basic dynamic load rating - C	7677 kN
Fatigue load limit P_u	765 kN
Calculation factor Y_1	1.9
Calculation factor Y_2	2.9
Calculation factor Y_0	1.8
Calculation factor - Y_2	2.9
Calculation factor - Y_1	1.9
Fatigue load limit - P_u	765 kN
Basic static load rating C_0	11600 kN
Basic static load rating - C_0	11600 kN