


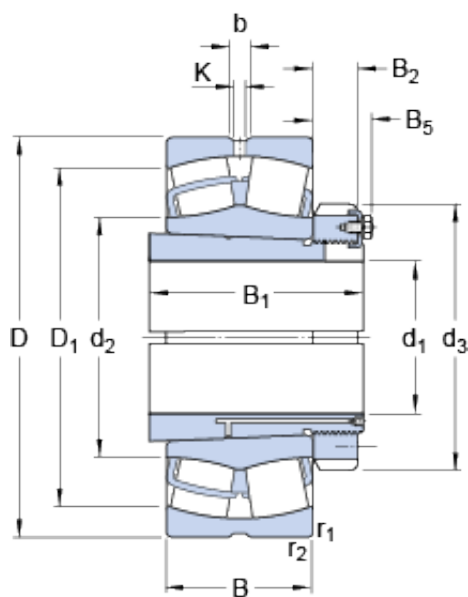

Bearing No. 23952 CCK/W33 + OH 3952 H

K	4.5 mm
b	8.3 mm
D	360 mm
B	75 mm
Size (mm)	360x240x75
Width (mm)	75
D ₁	331 mm
B ₁	116 mm
B ₅	46 mm
B ₂	34 mm
d ₃	310 mm
B ₁	116 mm
d ₁	240 mm
d ₂	287 mm
d ₁	240 mm
B ₂	34 mm
B ₅	46 mm
d ₃	310 mm
Bearing number	23952 CCK/W33 + OH 3952 H
Limiting speed	1900 r/min
Reference speed	1700 r/min
Bore Diameter (mm)	360
r _a max.	2 mm
B _a min.	12 mm
D _a max.	349 mm
d _b min.	270 mm
d _a max.	287 mm
Outer Diameter (mm)	240

d_a - max.	287 mm
Calculation factor e	0.18
$r_{1,2}$ min.	2.1 mm
r_a - max.	2 mm
B_a - min.	12 mm
D_a - max.	349 mm
d_b - min.	270 mm
D_1 ?	331 mm
d_2 ?	287 mm
Mass bearing + sleeve	35 kg
Calculation factor - e	0.18
$r_{1,2}$ - min.	2.1 mm
Basic dynamic load rating C	1055 kN
Basic dynamic load rating - C	1055 kN
Fatigue load limit P_u	156 kN
Calculation factor Y_1	3.8
Calculation factor Y_2	5.6
Calculation factor Y_0	3.6
Calculation factor - Y_2	5.6
Calculation factor - Y_1	3.8
Fatigue load limit - P_u	156 kN
Basic static load rating C_0	1800 kN
Basic static load rating - C_0	1800 kN