


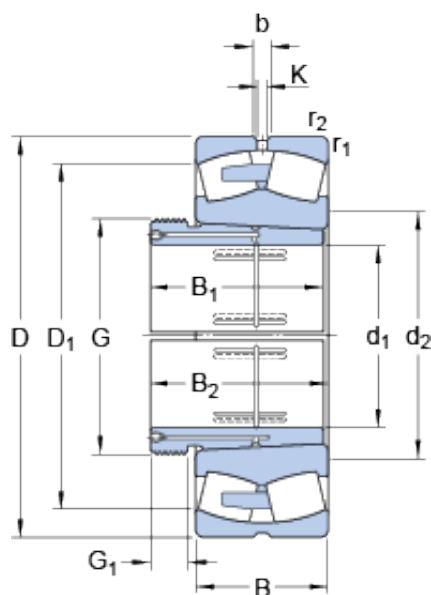

Bearing No. 240/1060 CAK30F/W33 + AOH 240/1060

D	1500 mm
B	438 mm
b	22.3 mm
K	12 mm
G	Tr 1120x8
Size (mm)	1500x1000x438
Width (mm)	438
d ₂	1199 mm
G ₁	1120 mm
G ₁	60 mm
B ₁	498 mm
d ₁	1000 mm
D ₁	1349 mm
B ₁	498 mm
d ₁	1000 mm
Bearing number	240/1060 CAK30F/W33 + AOH 240/1060
Limiting speed	260 r/min
Reference speed	150 r/min
D _a max.	1466 mm
r _a max.	8 mm
d _a min.	1080 mm
Bore Diameter (mm)	1500
Outer Diameter (mm)	1000
r _a - max.	8 mm
Calculation factor e	0.26
D _a - max.	1466 mm
d _a - min.	1080 mm
r _{1,2} min.	9.5 mm
	548 mm

B ² ?	
------------------	--

D_1 ?	1349 mm
d_2 ?	1199 mm
Mass bearing + sleeve	2950 kg
$r_{1,2}$ - min.	9.5 mm
Calculation factor - e	0.26
Basic dynamic load rating C	20724 kN
Basic dynamic load rating - C	20724 kN
Fatigue load limit P_u	2450 kN
Calculation factor Y_1	2.6
Calculation factor Y_2	3.9
Calculation factor Y_0	2.5
Calculation factor - Y_2	3.9
Calculation factor - Y_1	2.6
Fatigue load limit - P_u	2450 kN
Basic static load rating C_0	45500 kN
Basic static load rating - C_0	45500 kN