


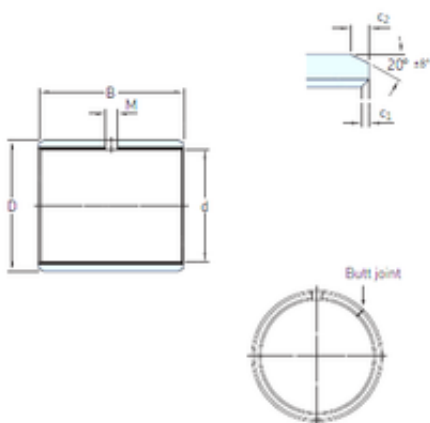

Bearing No. PCM 151712 M

D	17 mm
d	15 mm
B	12 mm
M	3 mm
Weight	0,0034 Kg
c1 min	0,1 mm
c2 min	0,2 mm
Size (mm)	15x17x12
Width (mm)	12
Mass bushing	0.0034 kg
? ±8	20 °
Bearing number	PCM 151712 M
Tolerance shaft	h8
Tolerance housing	H7
c ₂ min.	0.2 mm
c ₁ min.	0.1 mm
c ₁ max.	0.6 mm
c ₂ max.	1 mm
Bore Diameter (mm)	15
Outer Diameter (mm)	17
Basic dynamic load rating (C)	21,6 kN
Specific dynamic load factor K	120 N/mm ²
Permissible sliding velocity v min.	0 m/s
Permissible sliding velocity v max.	2.5 m/s
Coefficient of friction μ min.	0.02
Coefficient of friction μ max.	0.2

Specific static load factor K_0	250 N/mm ²
Basic dynamic load rating - radial direction C	21.6 kN
Basic static load rating - radial direction C_0	45 kN
Factor depending on material and bearing type K_M	1900