


Bearing No. RASE45

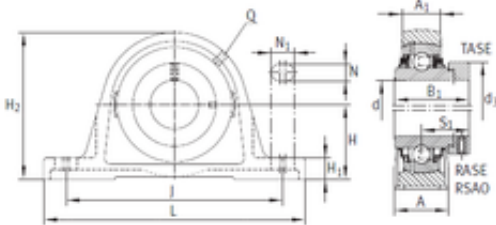

| | |
|----------------|---|
| N | 14 mm |
| d | 45 mm |
| A | 48 mm |
| H | 54 mm |
| J | 150 mm |
| L | 192 mm |
| N1 | 29 mm |
| S1 | 35,1 mm |
| d3 | 63 mm |
| A1 | 32 mm |
| B1 | 56,5 mm |
| H1 | 21,5 mm |
| H2 | 107 mm |
| Noun | Bearing |
| Bore | 1.772 Inch 45 Millimeter |
| Seals | Double Land Riding Rubber Contact |
| UNSPSC | 31171511 |
| Weight | 2,28 Kg |
| Category | Pillow Block |
| Inventory | 0.0 |
| Thread (Q) | Rp1/8 |
| Weight / LBS | 5.292 |
| Product Group | M06110 |
| Housing Style | 2 Bolt Pillow Block |
| Inch - Metric | Metric |
| Relubricatable | Yes |
| Keyword String | Pillow Block |
| Other Features | Single Row Standard Shaft Height With Set |

| | |
|-------------------------------|---|
| | Screw |
| Bearing number | RASE45 |
| Mounting Method | Eccentric Collar |
| Rolling Element | Ball Bearing |
| Length Thru Bore | 2.217 Inch 56.3 Millimeter |
| Manufacturer URL | http://www.ina.com |
| Housing Material | Cast Iron |
| Long Description | 2 Bolt Pillow Block; 45MM Bore; 54MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 136.5MM Minimum Bolt Spacing; 160.5MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Land Rid |
| Manufacturer Name | SCHAEFFLER GROUP |
| Weight / Kilogram | 2.4 |
| Bore Diameter (mm) | 45 |
| Insert Part Number | GE45KRRB |
| Bolt Spacing Minimum | 5.374 Inch 136.5Millimeter |
| Bolt Spacing Maximum | 6.319 Inch 160.5Millimeter |
| Minimum Buy Quantity | N/A |
| Housing Configuration | 1 Piece Solid |
| Base to Center Height | 2.126 Inch 54 Millimeter |
| Harmonized Tariff Code | 8483.20.40.40 |
| Manufacturer Item Number | RASE45 |
| Number of Mounting Holes | 2 |
| Expansion / Non- expansion | Non-expansion |

| | |
|-------------------------------|-----------------------------|
| Actual Bolt Center to Center | 0 Inch 0Millimeter |
| Nominal Bolt Center to Center | 5.8 Inch 146.5 Millimeter |
| Basic dynamic load rating (C) | 32,5 kN |